

RIVAL ADJUSTALBE

TRIMLESS

recessed type
downlight



- Aluminum injection body
- High efficiency reflector
- Adjustable Head, Trimless
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
RIVALTR.7.95.N.4.25	7	85	Ø95	Ø85	4000K	770
RIVALTR.7.95.N.4.47	7	85	Ø95	Ø85	4000K	750
RIVALTR.10.95.N.4.25	10	85	Ø95	Ø85	4000K	1070
RIVALTR.10.95.N.4.47	10	85	Ø95	Ø85	4000K	1050
RIVALTR.13.95.N.4.25	13	85	Ø95	Ø85	4000K	1260
RIVALTR.13.95.N.4.47	13	85	Ø95	Ø85	4000K	1240

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 220- 230V/AC - 50-60Hz
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 25°, 47°
- White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

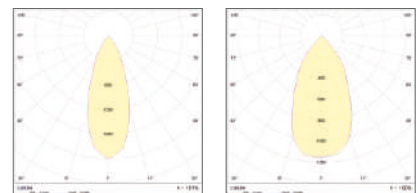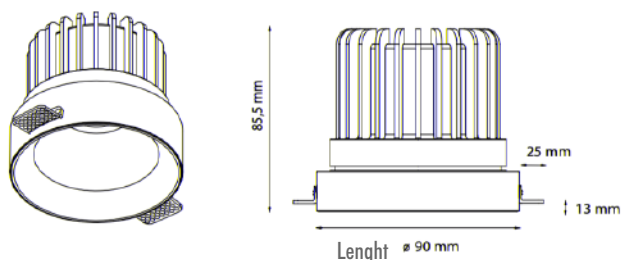

* For different options, please contact our team.