

recessed type
downlight



Aluminum injection body
High efficiency reflector
Tempered Glass
Current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-230V/AC - 50-60 Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 25°, 47°
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ARESDUO2".16.85.N.4.120	16	65	192	Ø85	4000K	1086
ARESDUO3".16.105.N.4.120	16	70	234	Ø105	4000K	1086
ARESDUO4".20.130.N.4.120	20	65	296	Ø130	4000K	1666
ARESDUO5".32.158.N.4.120	32	45	348	Ø158	4000K	2830
ARESDUO6".32.175.N.4.120	32	85	392	Ø175	4000K	2830
ARESDUO8".46.214.N.4.120	46	80	464	Ø214	4000K	4454


* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

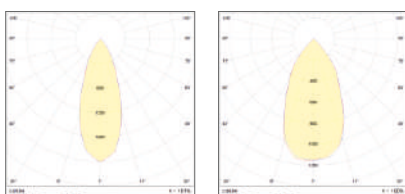

* For different options, please contact our team.

TECHNICAL DRAWINGS

