OFFICE CELL SF

LED surface type

backlight panel lighting fixture

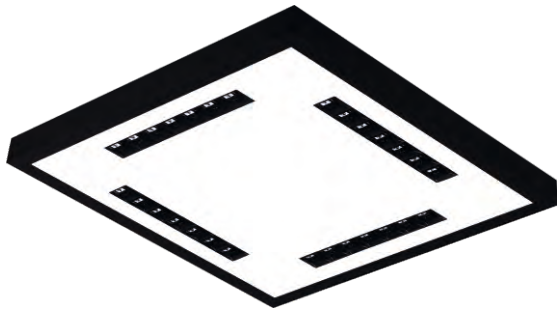

DKP sheet metal body
UV protected diffuser
Anti-glare optical lens
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standarts

LED | 230V | IP40 INT | CRI >80 | F | 60.000h L80 | McAdam C3 | CE | TSE

BASIC OPTIONS

- on/off — on/off Control (No Dimmable) Input
- 230V AC — Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 — Color Rendering Index >80
- 4K — Light Temperature 4000K
- Light Beam 120º
- White Satin Polycarbone Diffuser
- B — Black Body Color
- °C — -20C°/+40C° Temperature

PRODUCT CODE	W	Lenght	Temp	Lumen*
OFFICECELL.40.600x600.N.4.50	40	600x600	4000K	4200
OFFICECELL.40.600x600.N.4.80	40	600x600	4000K	4110

** According to 4000K light temperature*

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	Differemt Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90		W	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS



** For different options, please contact our team.*