

# ALTO 9

recessed type  
downlight



- Aluminum extrusion body
- Aluminum injection end caps
- PMMA optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



## BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index > 80
- Light Temperature 4000K
- Light Beam 36°, 35x 70°
- White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ALTO9.25.135.N.4.36	25	55	135	120x120	4000K	2375
ALTO9.25.135.N.4.35x70	25	55	135	120x120	4000K	2355
ALTO9.34.135.N.4.36	34	55	135	120x120	4000K	3230
ALTO9.34.135.N.4.35x70	34	55	135	120x120	4000K	3220
ALTO9.40.135.N.4.36	40	55	135	120x120	4000K	3600
ALTO9.40.135.N.4.35x70	40	55	135	120x120	4000K	3580

\*According to 4000K light temperature

## CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Black Body Color
- EMERGENCY KIT

## REFLECTOR





Black

## PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

## TECHNICAL DRAWINGS

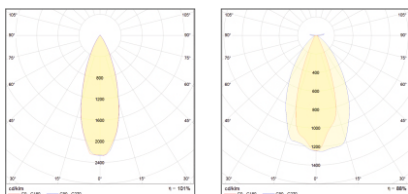

\* For different options, please contact our team.