

# MAMBO P 80

LED pendant type  
linear lighting fixture



- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts



## BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
<b>B</b>	Black Body Color
°C	-20°C/+40°C Temperature

PRODUCT CODE	W	Length	Temp	Lumen*
MAMBOP80.30.1000.N.4.120	30	1000	4000K	2485
MAMBOP80.40.1200.N.4.120	40	1200	4000K	3560


\* According to 4000K light temperature

## CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E

## PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	
XX	XX	XX	N V P T D	3 4 6	XX



## TECHNICAL DRAWINGS

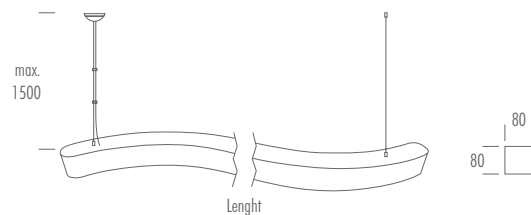

\* For different options, please contact our team.