


# AURA CELL SF

LED surface type

backlight panel lighting fixture



- DKP sheet metal body
- UV protected diffuser
- Anti-glare optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standarts

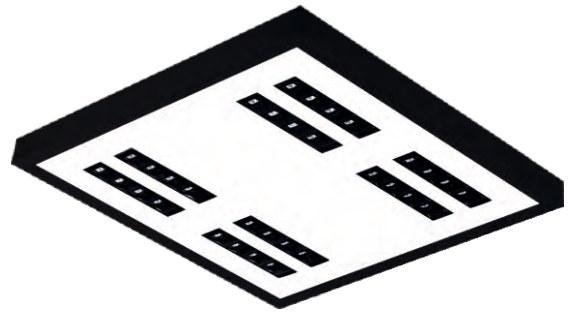

PRODUCT CODE	W	Lenght	Temp	Lumen*
AURACELLSF.40.600x600.N.4.50	40	600x600	4000K	4260
AURACELLSF.40.600x600.N.4.80	40	600x600	4000K	4180

\* According to 4000K light temperature

## BASIC OPTIONS

- on/off on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature


## PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX

## CUSTOMIZE OPTIONS

- Dimmable 1-10V 1-10V
- Dimmable PUSH PUSH
- Dimmable TRIAC TRIAC
- Dimmable DALI DALI
- Input Voltage 24V/DC 24V DC
- Light Temperature 3000K 3K
- Light Temperature 6500K 6.5K
- Dynamic White DYN
- Color Rendering Index > 90 CRI > 90
- Transparent Diffuser
- Different Body Color W
- EMERGENCY KIT E

## TECHNICAL DRAWINGS



\* For different options, please contact our team.