



ARIS WALL SINGLE

Surface Mounted
Wall Luminaire



Flawless Wall mounted luminaire that reflects numerous benefits in terms of installation, maintenance and operation with IP20. ARIS WALL SINGLE is a prime example of the immense power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly flawless cylindrical form.

The housing and technical components have been carefully selected to ensure economic efficiency and a long service life for all products in the range.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- Flawless form
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Exterior



Facade




Architectural



Ancient

ARIS WALL SINGLE

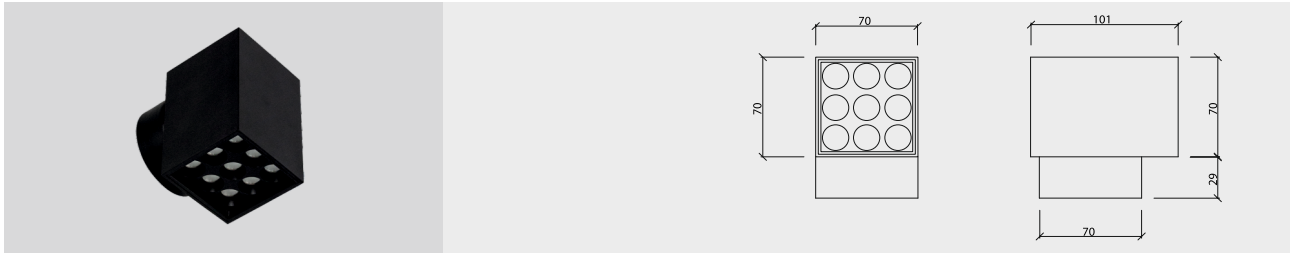

Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP20
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,80 - 1.20 kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Warranty	7-10 Years


REFLECTOR OPTIONS




Light Colors



Body Colors Options



Beam Angle Options

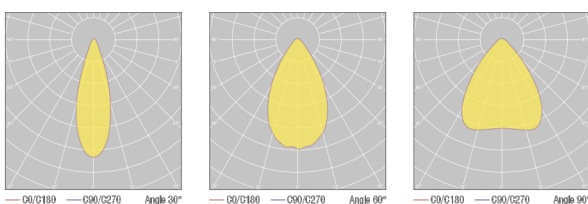

Ordering Details

Product Code	Power	Light Color	Lumen
ARISWALL.SINGLE.8.AC.N.4.30.9005	8W	4000K	745
ARISWALL.SINGLE.12.AC.N.4.30.9005	12W	4000K	1118

* For different options, please contact our team.

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	TRIAC PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX