


# AURORA

Double Side - UP an DOWN LED Lighting  
Surface / Wall Mounted Lights



**The AURORA's soft light creates strikingly beautiful light patterns and reveals stylistic finesse, which bewitches both owner and spectator. Thanks to AURORA, areas can tell stories.**

This almost magic effect is due to a very pragmatic approach, namely that extraordinary performance creates extraordinary effects. Its Contemporary design is perfect for enhancing residential and urban areas featuring a modern, Contemporary design. It creates a direct light beam, thanks to its monodirectional optics, able to enhance a precise area or subject, without glare.

## Characteristics

Aluminium Body

Electrostatic Powder Paint

Optional RAL Colors

PMMA Diffuser

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection (Optional)

5 Years Warranty

Marine Coating (Optional)

## Key Advantages

- Graceful, unmistakable and powerful statement of light
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

## Applications



Exterior



Facade




Architectural



Ancient

# AURORA

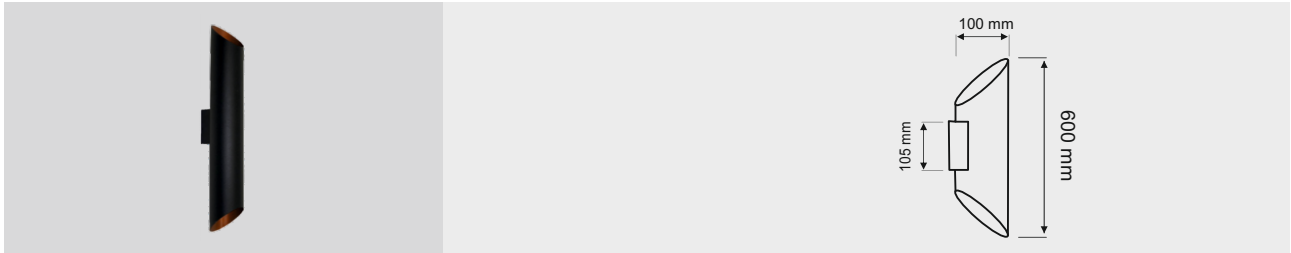


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP44-IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	5,5 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP65
Warranty	7-10 Years

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
AURORA.14.AC.N.4.30.9005	7x2W	4000K	2160
AURORA.20.AC.N.4.30.9005	10x2W	4000K	2790
AURORA.26.AC.N.4.30.9005	13x2W	4000K	3080
AURORA.30.AC.N.4.30.9005	15x2W	4000K	3520

\* For different options, please contact our team.

## Body Colors Options



## Beam Angle Options

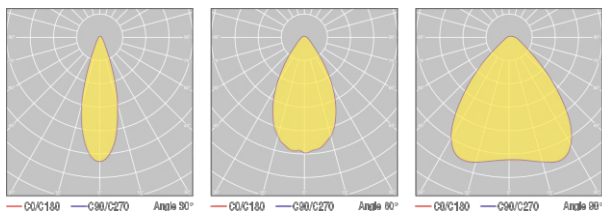

## Product Coding

Product Name	IP Rating	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	XX	AC DC on/off 1-10V	PUSH TRIAC DALI	3K 4K 6.5K	XX	XX
XX	XX	XX	AC DC N V P T D				