


LOOP MULTI

LED Multi-pendant type

Circular LED lighting fixture



- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standards

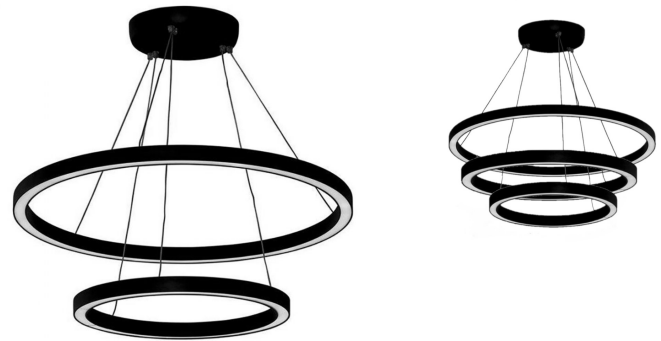

PRODUCT CODE	W	Length	Temp	Lumen*
LOOPMULTI1.30.400.N.4.120	30	400	4000K	2550
LOOPMULTI2.45.600.N.4.120	45	600	4000K	3825
LOOPMULTI3.60.800.N.4.120	60	800	4000K	5100
LOOPMULTI4.75.1000.N.4.120	75	1000	4000K	6375
LOOPMULTI5.90.1200.N.4.120	90	1200	4000K	7650
LOOPMULTI6.105.1400.N.4.120	105	1400	4000K	8925
LOOPMULTI7.120.1600.N.4.120	120	1600	4000K	10200
LOOPMULTI8.135.1800.N.4.120	135	1800	4000K	11475
LOOPMULTI9.150.2000.N.4.120	150	2000	4000K	12750
LOOPMULTI10.165.2200.N.4.120	165	2200	4000K	14025
LOOPMULTI11.180.2400.N.4.120	180	2400	4000K	15300
LOOPMULTI12.195.2600.N.4.120	195	2600	4000K	16575
LOOPMULTI13.210.2800.N.4.120	210	2800	4000K	17850
LOOPMULTI14.225.3000.N.4.120	225	3000	4000K	19125


* According to 4000K light temperature

* For different options, please contact our team.

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

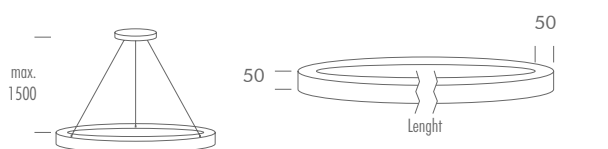

BASIC OPTIONS

- on/off Control (No Dimmable) Input
- 230V AC Voltage 220-240V/AC - 50/60 Hz 5
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 120°
- White Satin Polycarbonate Diffuser
- B Black Body Color
- °C -20C°/+40C° Temperature

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Transparent Diffuser
- Different Body Color
- EMERGENCY KIT

