

PARVUS

LED recessed type
Wall recessed lighting



A simple and structural accent for modern exteriors. PARVUS Outdoor LED recessed Wall light provides soft atmospheric lighting to accentuate outdoor spaces and offer guidance along pathways.

Made of aluminum, this rectangular fixture extends straight upward to allow its light to spill outward.

This luminaire is an iconic design in a modern reinterpretation to LED sources with outstanding performance, designed to guarantee an high visual comfort, glare-free lighting with no light pollution.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- Simple and structural for modern designs
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Exterior



Facade




Architectural



Ancient

PARVUS

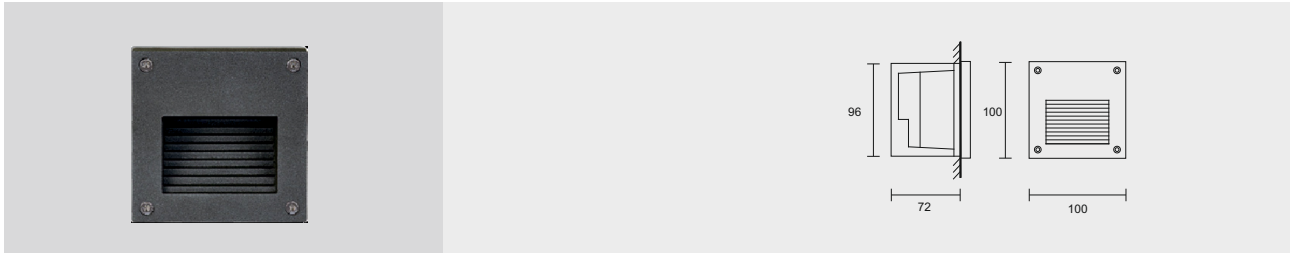


Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,90
Weight	0,75kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years

Light Colors




Ordering Details


Product Code	Power	Light Color	Lumen
PARVUS.3.180.AC.N.4.30.7016	3W	4000K	255
PARVUS.5.180.AC.N.4.30.7016	5W	4000K	425

* For different options, please contact our team.

Body Colors Options

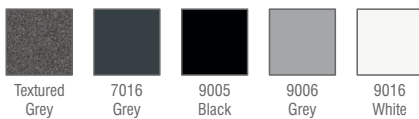

Light Effect



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	sw/Off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX