



- Aluminum injection body
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-230V/AC - 50-60Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 25°, 47°
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
QDOTL.7.90.N.4.23	7	75	125	90	4000K	770
QDOTL.7.90.N.4.37	7	75	125	90	4000K	750
QDOTL.7.90.N.4.51	7	75	125	90	4000K	730
QDOTL.10.90.N.4.23	10	75	125	90	4000K	1070
QDOTL.10.90.N.4.37	10	75	125	90	4000K	1050
QDOTL.10.90.N.4.51	10	75	125	90	4000K	1030


* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

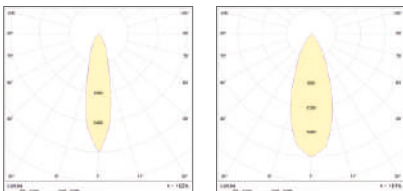

* For different options, please contact our team.

TECHNICAL DRAWINGS

