


# TRIP GLOBE

Wall Luminaire  
Surface/Wall or Ceiling Mounted

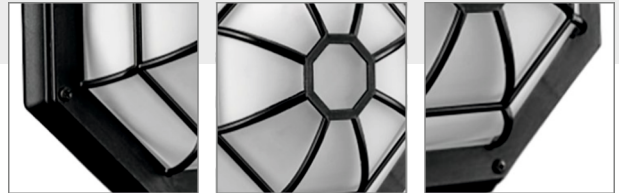

**Simple shapes are often best suited to the environment, and squares and circles have always been examples of harmony and perfection. In TRIP GLOBE, these characteristics are emphasized by applying a simple frame to the wall, which determines the luminous flux and accentuates objects even when closed.**

Aluminium Body with no visible screws and hidden installation tools. It is corrosion-free aluminium forms a uniform and integrated whole, and features a high-quality finish in metallic colours.

## Characteristics

- Aluminium Injection Body
- Electrostatic Powder Paint
- Optional RAL Colors
- Extra Clear 5mm Tempered Glass
- Aluminium PCB
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)
- Emergency Kit (Optional)


## Key Advantages

- Glare-free
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- UV Resistan Diffuser

## Applications



# TRIP GLOBE

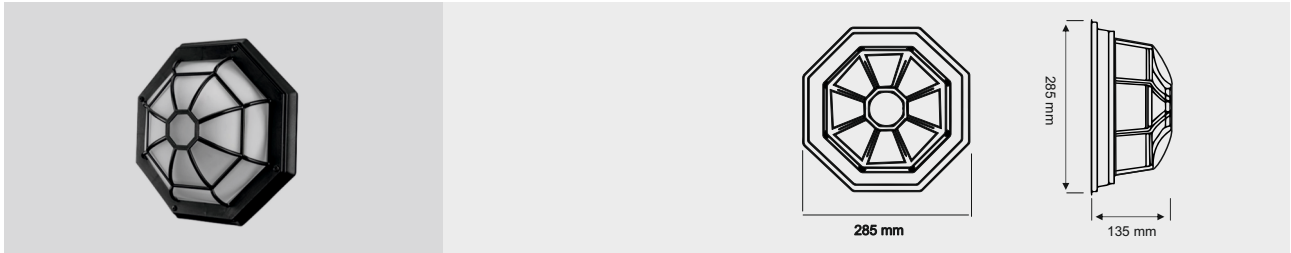


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9005 Black
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	2,73 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Emergency	3H Emergency Kit

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
TRIPGLOBE.15.AC.N.4.120.9005	15W	4000K	1640
TRIPGLOBE.20.AC.N.4.120.9005	20W	4000K	2250
TRIPGLOBE.30.AC.N.4.120.9005	30W	4000K	3010

\* For different options, please contact our team.

## Body Colors Options



## Beam Angle Options



## Product Coding

Product Name	Product Power	Input		Control System				Color Temperature			Light Beam	Body Color	
XX	XX	AC	DC	On/Off	1-10V	PUSH	TRAC	DALI	3K	4K	6.5K	XX	XX
XX	XX	AC	DC	N	V	P	T	D	3	4	6	XX	XX