



SATIN LINE Slim

LED Linear Strip
Wall mounted ledbar fixture

Aluminum extruded body
UV protected High homogenous light diffusion
with high-quality diffuser
Aluminum mounting brackets
Production in different lengths
Daisy-chain connection
topology up to 10 meters
(OPTIONAL) IP67 I/O Connectors
With IP Socket
ENEC Standards



IP SOCKET



BASIC OPTIONS


on/off	on/off Control (No Dimmable)
24V DC	Input Voltage 24V DC
CRI >80	Color Rendering Index >80
Temp	Light Temperature 2700K, 3000K, 4000K, 5000K, 6500K
▲	Light Beam 120°
●	White OPAL Polycarbonate Diffuser
°C	-20°C/+60°C Temperature
R-G-B	Amber, Red, Green or Blue Mono Color

PRODUCT CODE


PRODUCT CODE	W/M	LUMEN
SATINLINES	7W	910Lm
	12W	1560Lm
	14W	1820Lm
	18W	2340Lm

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	RGB PWM SIGNAL WITH RC	Light Color RGBW	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	PMW	RGBW	DYN	CRI >90	○	E

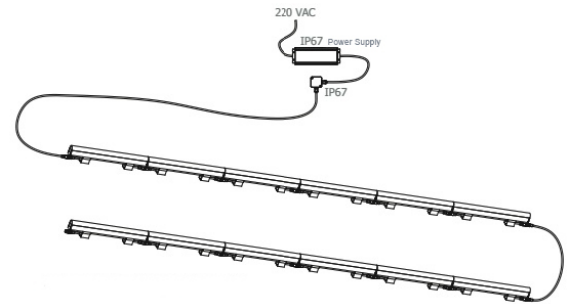

TECHNICAL DRAWINGS

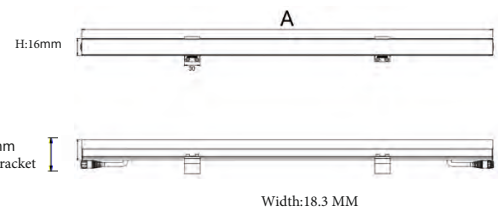

ACCESSORIES (OPTIONAL)



-IP Connector

* For different options, please contact our team.

