



- Aluminum extrusion body
- Aluminum heatsink
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 23°, 70°
W	White Body Color

PRODUCT	CODE	W	Height	Lenght	Temp	Lumen*
RODES.7.100.N.4.23		7	160	100	4000K	770
RODES.7.100.N.4.70		7	160	100	4000K	730
RODES.10.100.N.4.23		10	160	100	4000K	1070
RODES.10.100.N.4.70		10	160	100	4000K	1030
RODES.13.100.N.4.23		13	160	100	4000K	1260
RODES.13.100.N.4.70		13	160	100	4000K	1220


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

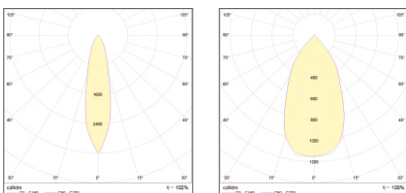

TECHNICAL DRAWINGS



* For different options, please contact our team.