

RODES DUO

LED surface type

downlight



- Aluminum extrusion body
- Aluminum heatsink
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Length	Temp	Lumen*
RODES2.14.100x200.N.4.24	14	100	100x200	4000K	770
RODES2.14.100x200.N.4.70	14	100	100x200	4000K	730
RODES2.20.100x200.N.4.24	20	100	100x200	4000K	1070
RODES2.20.100x200.N.4.70	20	100	100x200	4000K	1030
RODES2.26.100x200.N.4.24	26	100	100x200	4000K	1260
RODES2.26.100x200.N.4.70	26	100	100x200	4000K	1220

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 24°, 70°
- White Body Color


CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

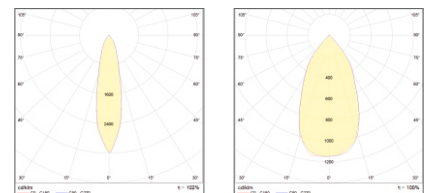

* For different options, please contact our team.