


CESAR White Dynamic White

Tunable Linear Type

Wallwasher



- Aluminum extrusion body
- Tempered Glass
- High Power LED
- High Efficiency Built-IN Power Supply
- Continuous interconnection with IP67 connectors
- Mounting bracket made of Stainless steel
- Power factor >90% full loading
- Production in different lengths
- Optional body colors
- ENEC Standards

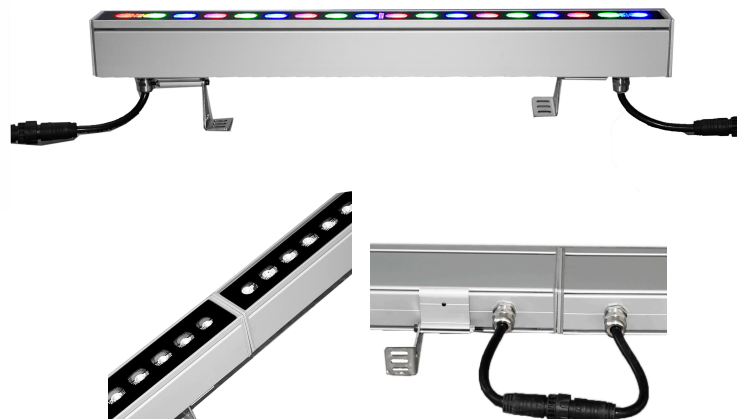

PRODUCT CODE	W	Length	Temp	Lumen*
CESART.9.328.N.WWW.X	9	328	2700K-6500K	
CESART.18.328.N.WWW.X	18	328	2700K-6500K	
CESART.18.628.N.WWW.X	18	628	2700K-6500K	
CESART.36.628.N.WWW.X	36	628	2700K-6500K	
CESART.27.928.N.WWW.X	27	928	2700K-6500K	
CESART.54.928.N.WWW.X	54	928	2700K-6500K	
CESART.36.1228.N.WWW.X	36	1228	2700K-6500K	
CESART.72.1228.N.WWW.X	72	1228	2700K-6500K	


BASIC OPTIONS

- on/off on/off Control (No Dimmable)
- 110-220V AC Input Voltage 110-240V/AC
- CRI >80 Color Rendering Index >80
- DYN >90 2700K-3000K-4000K-6500K
- Light Beam 12° / 20° / 34° / 45° / 60° /
- M 19 Asymm 3 / 3+3 pins Circular M19 Type
- DMX DMX512
- °C -30C°/+60C° Temperature
- CH Up to 4 channels Space address
- Ctrl Automatic or Manual Control
- LED Philips, Osram, Cree, Samsung LED Chips
- PS Meanwell, Philips, Osram Power Supply

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K			
XX XX XX	N V P T D	3 4 6			

TECHNICAL DRAWINGS

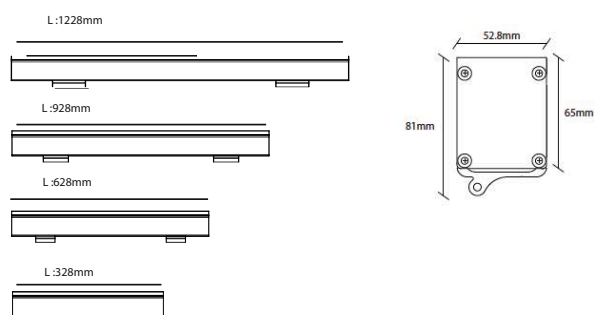

Hb-lux reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- RGB or RGBW Light
- RGB PWM SIGNAL WITH RC
- Color Rendering Index >90
- Black Body Color
- Emergency Kit
- IP68 Connectors

* For different options, please contact our team.