



Aluminum injection body
High efficiency reflector
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
Tempered Glass
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 16°, 24°, 46°, 74°
W	White Body Color

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODE	W	Height	Length	Temp	Lumen*
RIGA.20.0147.N.4.16	20	163	Ø112	4000K	2300
RIGA.20.0147.N.4.24	20	163	Ø112	4000K	2280
RIGA.20.0147.N.4.46	20	163	Ø112	4000K	2260
RIGA.20.0147.N.4.74	20	163	Ø112	4000K	2240
RIGA.30.0147.N.4.16	30	163	Ø112	4000K	3600
RIGA.30.0147.N.4.24	30	163	Ø112	4000K	3580
RIGA.30.0147.N.4.46	30	163	Ø112	4000K	3560
RIGA.30.0147.N.4.74	30	163	Ø112	4000K	3540
RIGA.42.0147.N.4.16	42	163	Ø112	4000K	5000
RIGA.42.0147.N.4.24	42	163	Ø112	4000K	4980
RIGA.42.0147.N.4.46	42	163	Ø112	4000K	4960
RIGA.42.0147.N.4.74	42	163	Ø112	4000K	4940
RIGA.55.0147.N.4.16	55	163	Ø112	4000K	6600
RIGA.55.0147.N.4.24	55	163	Ø112	4000K	6580
RIGA.55.0147.N.4.46	55	163	Ø112	4000K	6560
RIGA.55.0147.N.4.74	55	163	Ø112	4000K	6540

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	▲
XX	XX	XX	N V P T D	3 4 6	XX

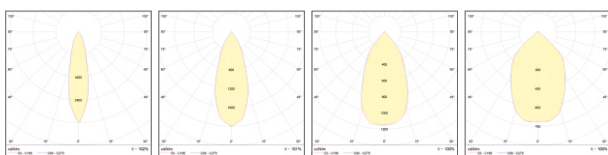

* For different options, please contact our team.

TECHNICAL DRAWINGS

