



Aluminum extruded body  
UV protected High homogenous light diffusion  
with high-quality diffuser  
Aluminum mounting brackets  
Production in different lengths  
Daisy-chain connection topology  
up to 10 meters  
IP67 I/O Connectors  
ENEC Standarts



### BASIC OPTIONS

on/off	on/off Control (No Dimmable)
24V DC	Input Voltage 24V DC
CRI >80	Color Rendering Index >80
Temp	Light Temperature 2700K, 3000K, 4000K, 5000K 6500K
▲	Light Beam 120°
●	White OPAL Polycarbonate Diffuser
°C	-20°C/+60°C Temperature
R-G-B	Amber, Red, Green or Blue Mono Color

### CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	RGB PWM SIGNAL WITH RC	Light Color RGBW	Dynamic White	Color Rendering Index >90	Transparent Diffuser	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	PMW	RGBW	DYN	CRI >90	○	E

### Optional Accessories




IP CONNECTOR

PRODUCT CODE	W/M	LUMEN
SATINLINE.7.100.4	7W	910Lm
SATINLINE.7.100.4	12W	1560Lm
SATINLINE.7.100.4	14W	1820Lm
SATINLINE.7.100.4	18W	2340Lm
SATINLINE.7.100.4	24W	3120Lm

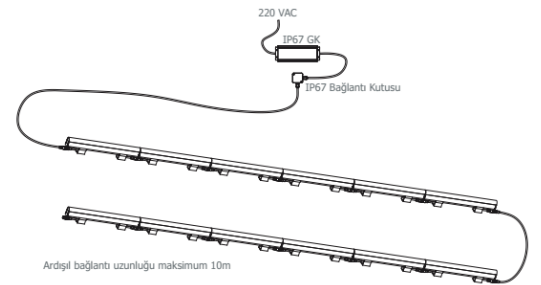

### TECHNICAL DRAWINGS

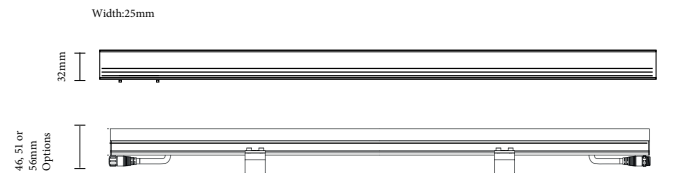

\* For different options, please contact our team.