

FLOS S

Floodlight Series



A family of Adjustable circle floodlight designed in different sizes, Powers and light options. Perfect choice to meet the outdoor lighting requirements which need high technicality and captivating design.

Flos Consists of Aluminium Injection Die-cast with a clear tempered Glass. It is fitted with Stainless steel screws. It is applicable to the ground with the special spike supplied. Flos projector is painted anthracite with polyester powders with high resistance to ultraviolet rays and corrosion. Flos family is certified IP66. Suitable for aggressive environments. Flos S is the smallest version which can catch 5W power.

Characteristics

Aluminium Injection Die Cast Body
Electrostatic Powder Coated
Optional RAL Colors
Adjustable Bracket
Heat & Impact Resistant Extra Clear 5mm Tempered Glass
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection (Optional)
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver


Key Advantages

- Modern design
- Exceptional thermal system
- High optical precision
- Excellent light output
- High IP protection
- High Ambient temperature
- Easy installation

Applications



FLOS S

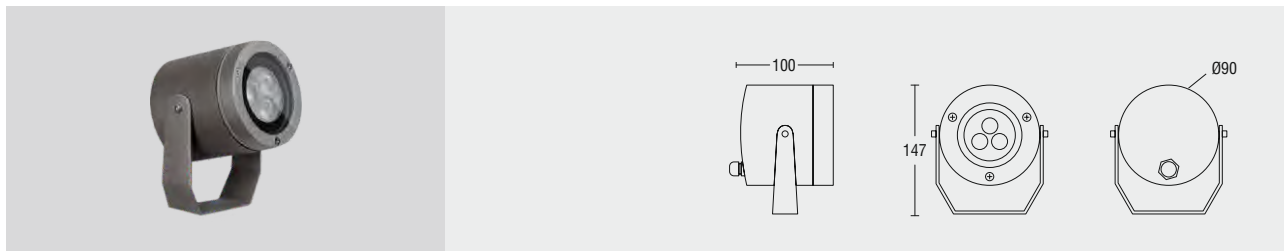


Standard Product

Input	100-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Surge protection	1KV
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	50°, 70°
Light Color	3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90

Light Colors

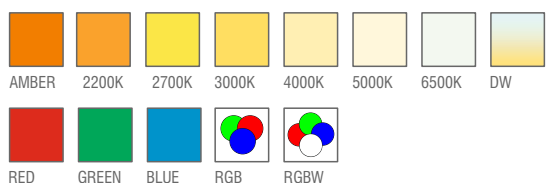


Ordering Details


Product Code	Power	Light Color	Beam Angle	Lumen
FLOSS.3.AC.N.4.30.7016	3W	4000K	30°	396
FLOSS.5.AC.N.4.30.7016	5W	4000K	30°	660
FLOSS.6.AC.N.4.30.7016	6W	4000K	30°	792

* For different options, please contact our team.

Beam Angle Options

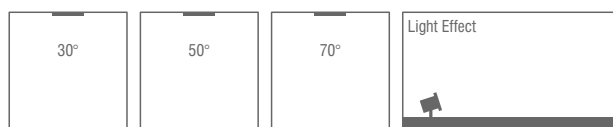

Body Colors Options



Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-30V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX