


HORTUS

Outdoor type
LED Bollard Lighting



Besides lighting the surrounding environment, the light plays with the lamp-object by revealing and enhancing the volumes. HORTUS in all its varieties, is an aesthetically pleasing object also when switched-off.

Designed for decorative lighting, HORTUS is a circle lamp with a customizable perforated cage made of Aluminium. To restore ambient lighting, the luminaire is equipped with a IP66 a integrated driver. Equipped with a discreet locking mechanism and tool-less entry for maintenance. Suitable for adding a touch of elegance to a private pathway.

Characteristics

Aluminium body

GU10 Lighting

High efficiency LED lighting

PMMA light diffuser

Electrostatic powder paint

High quality silicon gasket

Galvanized metal anchorage

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

ENEC Certified Driver

Key Advantages

- Shaped lighting
- Small size
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Landscape




Outdoor



Urban

HORTUS

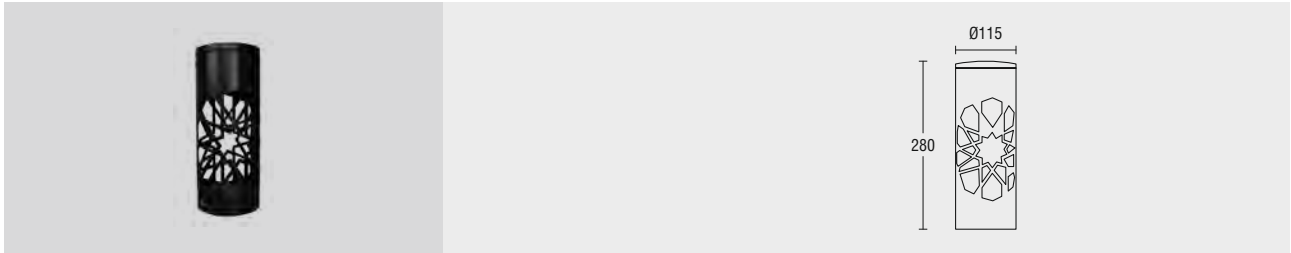


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options



Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
HORTUS.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
HORTUS.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
HORTUS.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
HORTUS.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
HORTUS.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
HORTUS.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
HORTUS.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
HORTUS.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
HORTUS.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
HORTUS.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280

* For different options, please contact our team.



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX