

KULA

Outdoor Type
Decorative Lighting Poles



KULA represent the maximum expression of love and respect for the tradition of great historical city centers.

This HB-LUX decorative classic layout is ideal for lighting public parks, squares or pedestrian areas. The Urban lighting version is perfect to complement the public lighting of a park or a pedestrian area, ideal for adding elegance to an entrance or to enhance city parks, squares or pedestrian areas. with a classic-style décor is able to enhance the value of historic city centres giving them a timeless style.

Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

Applications



Landscape




Outdoor



Urban

KULA

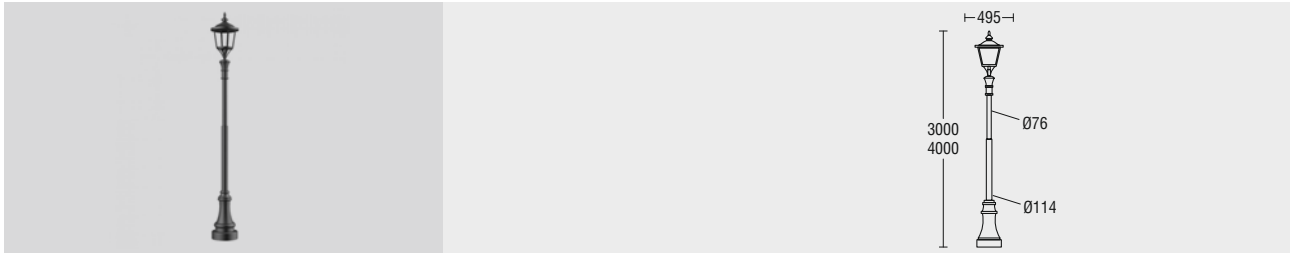

Standard Product


Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options


** Possibility of production in different lengths and sections.*

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66-IP67
Warranty	7-10 Years


Light Colors



Body Colors Options

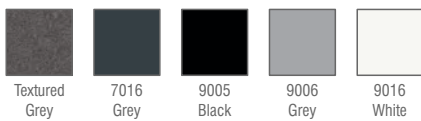

Light Effect



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
KULA.30.AC.N.4.SYM.7016	30W	4000K	3000	3960
KULA.40.AC.N.4.SYM.7016	40W	4000K	4000	5280
KULA.50.AC.N.4.SYM.7016	50W	4000K	4000	6600
KULA.60.AC.N.4.SYM.7016	60W	4000K	4000	7920

** For different options, please contact our team.*



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX XX	XX	