

# ROSA

Floodlight Series



**A family of Adjustable floodlight designed in different sizes, Powers and light options. Perfect choice to meet the outdoor lighting requirements which need high technicality and captivating design.**

Floodlights for outdoor lighting ROSA, excellent performance in a compact, essential and sturdy design. Totally adjustable and equipped with a wide range of optics, ROSA floodlights are perfect for enhancing architectures and greeneries with accent lighting and decorative effects. It has Small-size, essential design, that integrates seamlessly into any environment.

## Characteristics

- Aluminium Injection Die Cast Body
- Electrostatic Powder Coated
- Optional RAL Colors
- Adjustable Bracket
- Heat & Impact Resistant Extra Clear 5mm Tempered Glass
- Aluminium PCB
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection (Optional)
- 5 Years Warranty
- Marine Coating (Optional)
- ENEC Certified Driver


## Key Advantages

- Modern design
- Exceptional thermal system
- High optical precision
- Excellent light output
- High IP protection
- High Ambient temperature
- Easy installation

## Applications



# ROSA

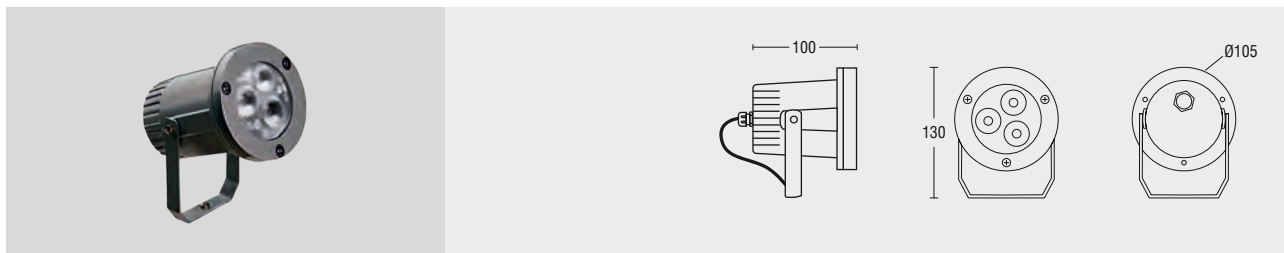


## Standard Product

Input	100-240V / AC 50-60Hz
Control	On / Off
Optic	30°
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Surge protection	1KV
Weight	- kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Frosted Diffuser Glass
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years

## Light Colors

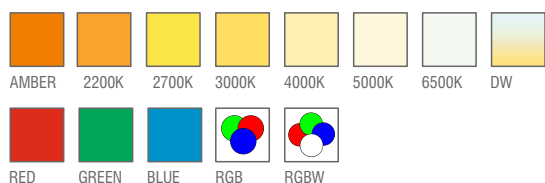


## Ordering Details

Product Code	Power	Light Color	Beam Angle	Lumen
ROSA.1.AC.N.4.30.7016	1W	4000K	30°	118
ROSA.3.AC.N.4.30.7016	3W	4000K	30°	345
ROSA.5.AC.N.4.30.7016	5W	4000K	30°	570

\* For different options, please contact our team.

## Beam Angle Options

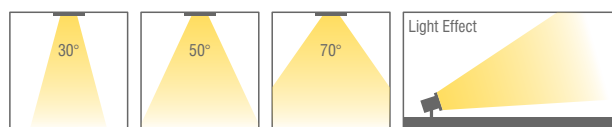

## Body Colors Options



## Optional Accessories



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC on/off 1-30V	PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX