

recessed type
downlight



Aluminum injection body
High efficiency reflector
Tempered Glass
Current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-230V/AC - 50-60 Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 25°, 47°
w	White Body Color

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ARO.7.192.N.4.25	14	85	192	85+85	4000K	1540
ARO.7.192.N.4.47	14	85	192	85+85	4000K	1520
ARO.10.192.N.4.25	20	85	192	85+85	4000K	2410
ARO10.192.N.4.47	20	85	192	85+85	4000K	2390


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

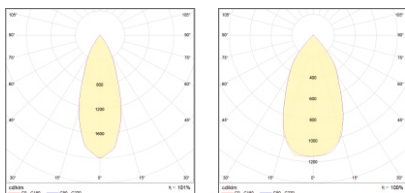

TECHNICAL DRAWINGS

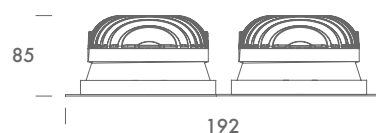

* For different options, please contact our team.