

# RICIO

recessed type  
downlight



Aluminum injection body  
Tempered glass  
Constant current LED driver  
Electrostatic powder coating  
paint Optional body colors  
ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
RICIO.7.90.N.4.19	7	70	Ø90	Ø70	4000K	770
RICIO.7.90.N.4.40	7	70	Ø90	Ø70	4000K	750
RICIO.10.90.N.4.19	10	70	Ø90	Ø70	4000K	1070
RICIO.10.90.N.4.40	10	70	Ø90	Ø70	4000K	1050

\* According to 4000K light temperature


## BASIC OPTIONS

-  on/off Control (No Dimmable)
-  Input Voltage 220V- 230V/AC - 50-60Hz
-  Color Rendering Index >80
-  Light Temperature 4000K
-  Light Beam 19°, 40°
-  Black Body Color



## PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

## CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC Light	Temperature 3000K Light	Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser Black	Body / GreyColor	Emergency Kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E

## TECHNICAL DRAWINGS

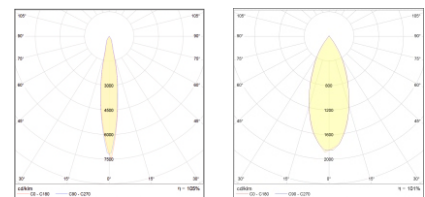

\* For different options, please contact our team.