


COSMO

recessed type
downlight



- Aluminum injection body
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
COSMO.7.105.N.4.23	7	65	Ø117	Ø105	4000K	770
COSMO.7.105.N.4.37	7	65	Ø117	Ø105	4000K	750
COSMO.7.105.N.4.51	7	65	Ø117	Ø105	4000K	730
COSMO.10.105.N.4.23	10	65	Ø117	Ø105	4000K	1070
COSMO.10.105.N.4.37	10	65	Ø117	Ø105	4000K	1050
COSMO.10.105.N.4.51	10	65	Ø117	Ø105	4000K	1030

* According to 4000K light temperature

BASIC OPTIONS

- on/off on/off Control (No Dimmable)
- 230V AC Input Voltage 230V/AC
- CRI > 80 Color Rendering Index > 80
- 4K Light Temperature 4000K
- Light Beam 23°, 37°, 51°
- w White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

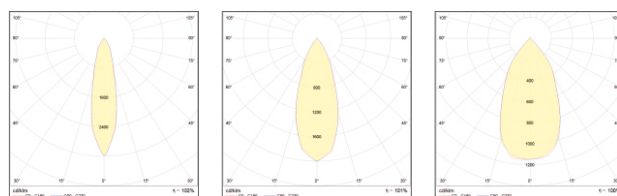

* For different options, please contact our team.