



- Aluminum extrusion body
- Aluminum injection end caps
- PMMA optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 36°, 35x 70°
W	White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
ALTO15.50.62x595.N.4.36	50	61	62x595	48x587	4000K	1140
ALTO15.50.62x595.N.4.35x7	50	61	62x595	48x587	4000K	1130
ALTO15.70.62x595.N.4.36	70	61	62x595	48x587	4000K	1425
ALTO15.70.62x595.N.4.35x7	70	61	62x595	48x587	4000K	1415
ALTO15.90.62x595.N.4.36	90	61	62x595	48x587	4000K	1710
ALTO15.90.62x595.N.4.35x70	90	61	62x595	48x587	4000K	1700
ALTO15.105.62x595.N.4.36	105	61	62x595	48x587	4000K	8715
ALTO15.105.62x595.N.4.35x70	105	61	62x595	48x587	4000K	8700

* According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black Body Color	Grey Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	G

REFLECTOR OPTIONS





Black

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

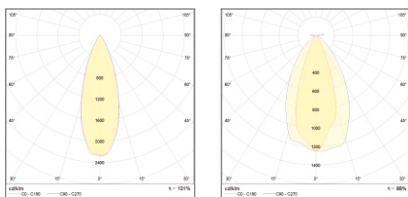

* For different options, please contact our team.