


Aluminium injection body
PMMA optical lens
Constant current LED driver
Electrostatic powder coating paint
Optional body colors
ENEC standards



BASIC OPTIONS

| | |
|---------|-------------------------------------|
| on/off | on/off Control (No Dimmable) |
| 230V AC | Input Voltage 220-240V/AC, 50-60HZ |
| CRI >80 | Color Rendering Index > 80 |
| 4K | Light Temperature 4000K |
| | Light Beam 36°, 35x70° |
| | Operating Temperature : -20 / 40 °C |
| w | White Body Color |

| PRODUCT CODE | W | Height | Length | Hole Size | Temp | Lumen* |
|---------------------|----|--------|--------|-----------|-------|--------|
| ALTO.3.62.N.4.36 | 3 | 62 | 62 | 48x52 | 4000K | 320 |
| ALTO.3.62.N.4.35x70 | 3 | 62 | 62 | 48x52 | 4000K | 310 |
| ALTO.4.62.N.4.36 | 4 | 62 | 62 | 48x52 | 4000K | 410 |
| ALTO.4.62.N.4.35x70 | 4 | 62 | 62 | 48x52 | 4000K | 400 |
| ALTO.5.62.N.4.36 | 5 | 62 | 62 | 48x52 | 4000K | 520 |
| ALTO.7.62.N.4.35x70 | 7 | 62 | 62 | 48x52 | 4000K | 644 |
| ALTO.10.62.N.4.36 | 10 | 62 | 62 | 48x52 | 4000K | 920 |

According to 4000K light temperature

REFLECTOR OPTIONS




CUSTOMIZE OPTIONS


| | | | | | | | | | | | |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|---------------------|--------------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Optional Body Color | Optional Reflector Color | Emergency KIT |
| 1-10V | PUSH | TRIAC | DALI | 24V DC | 3K | 6.5K | DYN | CRI >90 | B | R | E |

PRODUCT CODING

| Product Name | Product Power | Product Size | Control System | Color Temperature | Light Beam |
|--------------|---------------|--------------|----------------|-------------------|------------|
| XX XX XX | on/off | 1-10V | PUSH | TRIAC | DALI |
| XX XX XX | N | V | P | T | D |
| | | | | 3 | 4 |
| | | | | 6 | XX |

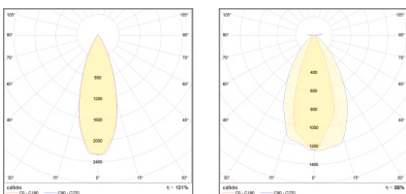

TECHNICAL DRAWINGS

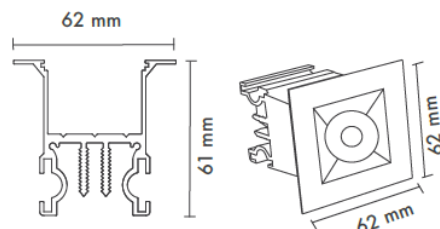

*For different options, please contact our team.