

ARO TRIO



recessed type
downlight

- Aluminum injection body
- High efficiency reflector
- Tempered glass
- Constant current LED driver
- Electrostatic powder coating
- paint Optional body colors
- ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
TARO.7.285.N.4.25	21	85	285	85+85+85	4000K	2310
TARO.7.285.N.4.47	21	85	285	85+85+85	4000K	2290
TARO.10.285.N.4.25	30	85	285	85+85+85	4000K	3210
TARO.10.285.N.4.4	30	85	285	85+85+85	4000K	3190

* According to 4000K light temperature

BASIC OPTIONS

- on/off Control (No Dimmable)
- 230V AC Input Voltage 220-230V/AC - 50.60Hz
- CRI >80 Color Rendering Index >80
- 4K Light Temperature 4000K
- Light Beam 25°, 47°
- w White Body Color



CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

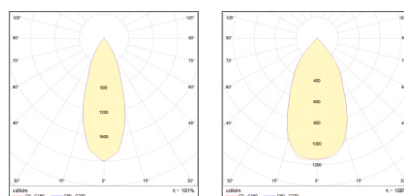

* For different options, please contact our team.