

ARROW

Outdoor Type
Decorative Lighting Poles



ARROW is the LED pole-top luminaire featuring a classic but modern design and a diffused and comfortable lighting, thanks to the direct light radial optic.

Wide range of optics, powers and color temperatures to meet any lighting project need. Featuring an elegant, timeless design, excellent performance and fort he latest lighting designs. Its diffused wide optic provides a homogeneous, pleasant lighting with high visual comfort and no glare.

Characteristics

Galvanized Steel
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

Applications




Landscape



Outdoor



Urban

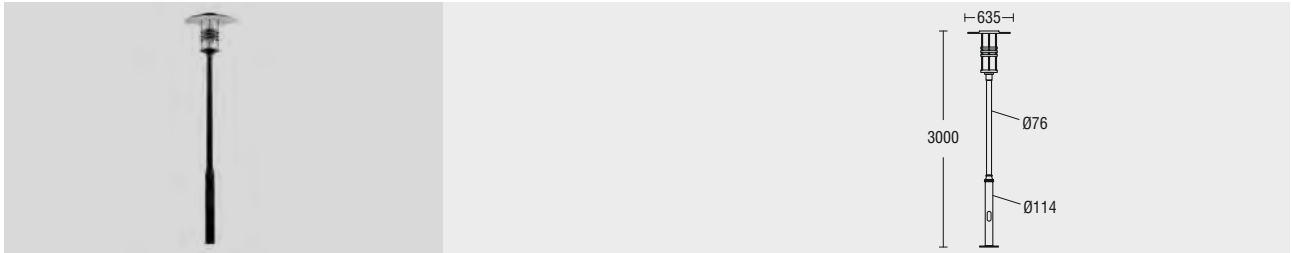

Standard Product


Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options


* Possibility of production in different lengths and sections.

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years


Light Colors



Body Colors Options

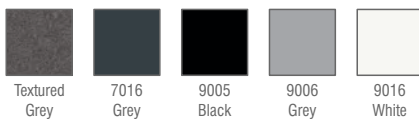

Light Effect



Optional Accessories



IP67
Junction
Box

Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
ARROW.35.AC.N.4.SYM.7016	35W	4000K	3000	4620
ARROW.50.AC.N.4.SYM.7016	50W	4000K	3000	6600
ARROW.60.AC.N.4.SYM.7016	60W	4000K	3000	7920

* For different options, please contact our team.



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	push/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX XX	AC DC	N V P T D		3 4 6	XX	XX