

ASYA family

recessed type
downlight



Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic(3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors,
ENEC Standards



PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen*
ASYA 2".6.84.N.4.105	6	80	Ø84	Ø70	4000K	570
ASYA 3".6.112.N.4.105	6	55	Ø112	Ø95	4000K	570
ASYA 4".8.131.N.4.105	8	55	Ø131	Ø115	4000K	760
ASYA 5".10.159.N.4.105	10	55	Ø159	Ø140	4000K	1050
ASYA 6".16.188.N.4.105	16	55	Ø188	Ø165	4000K	1840
ASYA 10".23.240.N.4.105	23	55	Ø240	Ø220	4000K	2703
ASYA 10".30.240.N.4.105	30	55	Ø240	Ø220	4000K	2850

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 230V/AC
CRI >80	Color Rendering Index >80
3K	Light Temperature 3000K
▲	Light Beam 105
●	White Polystyren Diffuser
w	White Body Color

* According to 3000K light temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	N V P T D	3 4 6	XX		

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 4000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Transparent Diffuser	<a ^ mk]]Ghlagfk	□ = E=J? = F; Q; CAL
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90	○	D	E

TECHNICAL DRAWINGS

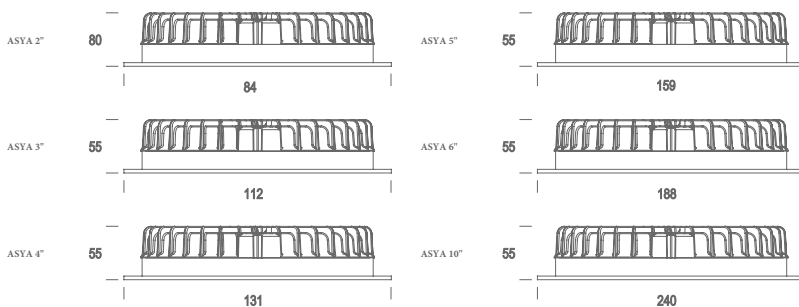

* For different options, please contact our team.