

AURA LINE 50 IN

pendant & surface type

Direct & Indirect linear lighting fixture

Aluminum extruded body

UV protected diffuser

Adjustable length steel ropes

Nickel plated brass parts

Constant current LED driver

Electrostatic powder coating paint

Production in different lengths

Up and Down

Direct and Indirect Lighting

Optional body colors

ENEC standards






PRODUCT CODE	W	Length	Temp	Lumen*
AURA LINE IN50.11.500.N.4.120	11	500	4000K	1133
AURA LINE IN50.16.500.N.4.120	16	500	4000K	1648
*AURA LINE IN50.15.600.N.4.120	15	600	4000K	1725
AURA LINE IN50.18.600.N.4.120	18	600	4000K	1854
*AURA LINE IN50.20.800.N.4.120	20	800	4000K	2300
AURA LINE IN50.22.1000.N.4.120	22	1000	4000K	2266
AURA LINE IN50.25.1000.N.4.120	25	1000	4000K	2575
AURA LINE IN50.32.1000.N.4.120	32	1000	4000K	3296
AURA LINE IN50.32.1100.N.4.120	30	1100	4000K	3450
AURA LINE IN50.27.1200.N.4.120	27	1200	4000K	2781
AURA LINE IN50.28.1200.N.4.120	28	1200	4000K	2884
AURA LINE IN50.39.1200.N.4.120	39	1200	4000K	4017
AURA LINE IN50.30.1300.N.4.120	30	1300	4000K	3090
AURA LINE IN50.36.1400.N.4.120	36	1400	4000K	3708
AURA LINE IN50.33.1500.N.4.120	33	1500	4000K	3399
AURA LINE IN50.45.1500.N.4.120	45	1500	4000K	4635
AURA LINE IN50.48.1500.N.4.120	48	1500	4000K	4944
*AURA LINE IN50.45.1800.N.4.120	45	1800	4000K	5175
AURA LINE IN50.48.1800.N.4.120	48	1800	4000K	4944
AURA LINE IN50.44.2000.N.4.120	44	2000	4000K	4532
AURA LINE IN50.54.2000.N.4.120	54	2000	4000K	5562
AURA LINE IN50.64.2000.N.4.120	64	2000	4000K	6592
*AURA LINE IN50.44.2500.N.4.120	44	2500	4000K	5060
AURA LINE IN50.64.2500.N.4.120	64	2500	4000K	6510
AURA LINE IN50.65.3000.N.4.120	65	3000	4000K	6695
AURA LINE IN50.96.3000.N.4.120	96	3000	4000K	9888

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	XX
XX	XX	XX	N V P T D	3 4 6	XX

TECHNICAL DRAWINGS

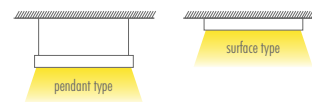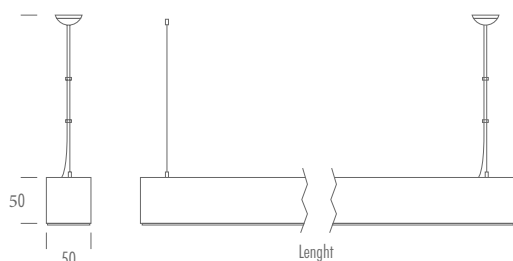


BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 120°
🌡️	Operating Temperature : -20 / 40 °C
B	Black Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E	M



* For different options, please contact our team.