





AURA FLUT 100

pendant & surface type
linear lighting fixture

- Aluminum extruded body
- UV protected diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards




BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
▲	Light Beam 120°
🌡️	Operating Temperature : -20 / 40 °C
G	Black Body Color

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Emergency KIT	Pendant or Surface Type
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	E	M




PRODUCT CODE	W	Length	Temp	Lumen*
AURA FLUT 100.11.500.N.4.120	11	500	4000K	1265
AURA FLUT 100.16.500.N.4.120	16	500	4000K	1840
AURA FLUT 100.18.500.N.4.120	18	500	4000K	2070
AURA FLUT 100.24.800.N.4.120	24	800	4000K	2760
AURA FLUT 100.22.1000.N.4.120	22	1000	4000K	2530
AURA FLUT 100.30.1000.N.4.120	30	1000	4000K	3450
AURA FLUT 100.32.1000.N.4.120	32	1000	4000K	3680
AURA FLUT 100.36.1200.N.4.120	36	1200	4000K	4140
AURA FLUT 100.45.1300.N.4.120	45	1300	4000K	5175
AURA FLUT 100.44.1500.N.4.120	44	1500	4000K	5060
AURA FLUT 100.48.1500.N.4.120	48	1500	4000K	5520
AURA FLUT 100.54.1500.N.4.120	54	1500	4000K	6210
AURA FLUT 100.54.2000.N.4.120	54	2000	4000K	6210
AURA FLUT 100.78.2000.N.4.120	78	2000	4000K	8970
AURA FLUT 100.64.2500.N.4.120	64	2500	4000K	7360
AURA FLUT 100.66.3000.N.4.120	66	3000	4000K	7590
AURA FLUT 100.96.3000.N.4.120	96	3000	4000K	11040

* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX XX	XX	XX	on/off 1-10V PUSH TRIAC DALI	3K 4K 6.5K	▲
XX XX XX	N	V	P T D	3 4 6	XX

TECHNICAL DRAWINGS

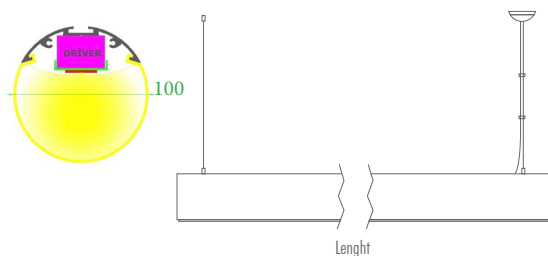

* For different options, please contact our team.