

AXIS WALL SQ

Wall Inground
Built-IN lighting fixture



AXIS is our smallest 1 LED Recessed Wall light which fulfills two important requirements: Small dimensions and powerful light effect.

The plug and play design simplifies installation, protecting the system from water infiltration and ensuring long-lasting performance. Built with robust, high-quality materials that are resistant to harsh environments.

With its small diameter, dimension, Axis wall recessed Wall light allows to create powerful and pure light effect. It can be used as a single point of light, thanks to its dimensions. Suitable for installation Wall for outdoor areas.

Characteristics

Aluminium Injection Body

Electrostatic Powder Paint

Optional RAL Colors

Extra Clear 5mm Tempered Glass

Aluminium PCB

LED with Life Span > 100.000 Hours

CCT tolerance within a 3 step MacAdams ellipse

Corrosion Protection

5 Years Warranty

Marine Coating (Optional)

Key Advantages

- High thermal performance
- High corrosion resistance
- High IP protection
- Excellent light output
- High Ambient temperature
- Easy installation
- Stainless Steel Frame
- Frosted Glass

Applications



Exterior



Facade




Architectural



Ancient

AXIS WALL SQ

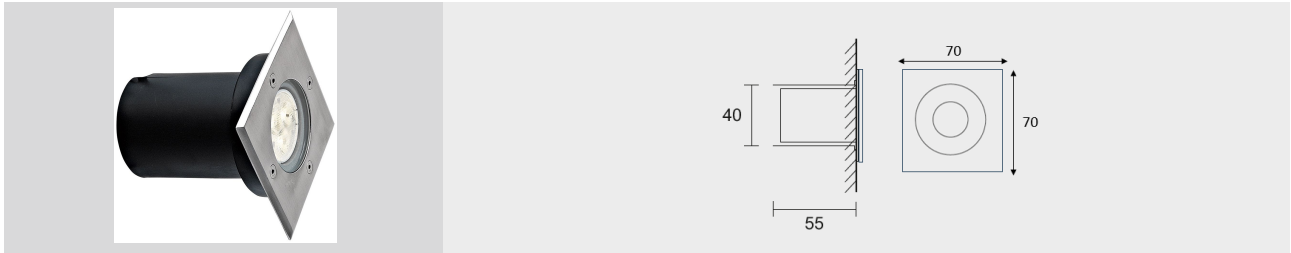


Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	90°
Light Color	3000K
Body Color	9006 Grey
CRI	>82
Protection	IP67
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	0,78kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Optic	30°, 60°, 90°
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP68
Warranty	7-10 Years

Light Colors




Ordering Details

Product Code	Power	Light Color	Lumen
AXISWSQ.2.AC.N.4.30.StainlessSteel	2.1W	4000K	240

* For different options, please contact our team.

Body Colors Options

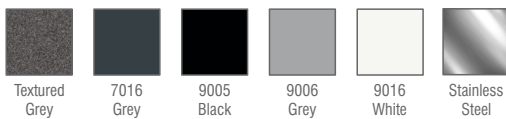

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color								
XX	XX	AC	DC	on/off	1-10V	PUSH	TRAC	DALI	D	3K	4K	6.5K	XX	XX
XX	XX	AC	DC	N	V	P	T	D	3	4	6	XX	XX	

Beam Angle Options

