


CESAR SLIM RGBW

Linear LED Wallwasher
Surface Mounted Facade Lighting



Cesar slim exterior wallwasher luminarie is mainly used wall washing, spot lighting and flood lighting. Continuous interconnection with IP67 connectors Mounting bracket made of stainless steel.

Aluminium extruded body with aluminium end caps offering various installation types. It is available as dimming options and many customizations options.

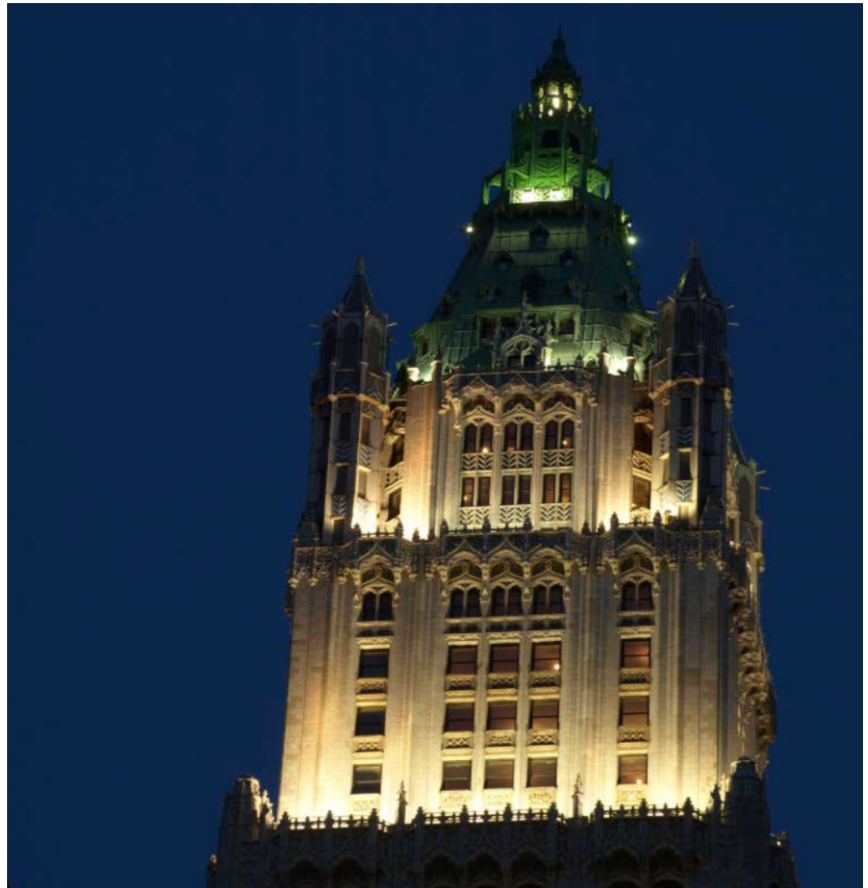

CESAR SLIM RGBW

Linear LED Wallwasher
Surface Mounted Facade Lighting

Basic Options

Light Source	High Power LED
Light Source Color	RGBW
Control Interface	DMX
Protection Class IEC	Class 1
CE Mark	Yes
ENEC Standards	Yes
Warranty Period	5 years
L 70	> 60 000 Hours
MacAdams	3 Step MacAdams
Ambient Temperature	-25°C to +60°C
CRI	>80

Optics

Light Distribution	30°/60°/90°/120°/Asm
--------------------	----------------------

Connection

Connection Cable	5 pins circular
------------------	-----------------

Customized Options

Power	14W - 53W ± %5
Led Qty	8 / 16 / 24 / 32 / 40
Input Voltage	24V/DC
CRI	>90 (Optional)
Light Color	RGBW

Electrical Options

Input Voltage	24V/DC
Input Frequency	50-60Hz
Electrical Protection Class	Class I

Body Options

Housing	Aluminium Extrusion
Gasket	Silicone
Protection Rating	IP67
Impact Resistance	IK09
Color	Grey
Dimensions (LxWxH)	310-1510x39x16
Screws	316 Stainless Steel
End Caps	Aluminium Extrusion



CESAR SLIM RGBW

Linear LED Wallwasher
Surface Mounted Facade Lighting


Ordering Details

Product Code	Input	Power	Light Color	Length	Control
Cesar Slim.14.320.D.RGBW.XX	24V/DC	14W	RGBW	320mm	DMX
Cesar Slim.27.620.D.RGBW.XX	24V/DC	27W	RGBW	620mm	DMX
Cesar Slim.40.920.D.RGBW.XX	24V/DC	40W	RGBW	920mm	DMX
Cesar Slim.53.1220.D.RGBW.XX	24V/DC	53W	RGBW	1220mm	DMX

Product Coding

Product Name	Product Power	Product Size	Control System	Color	Light Beam
XX	XX	XX	DMX	RGB	XX
XX	XX	XX	D	RGBW	XX

Technical Drawing

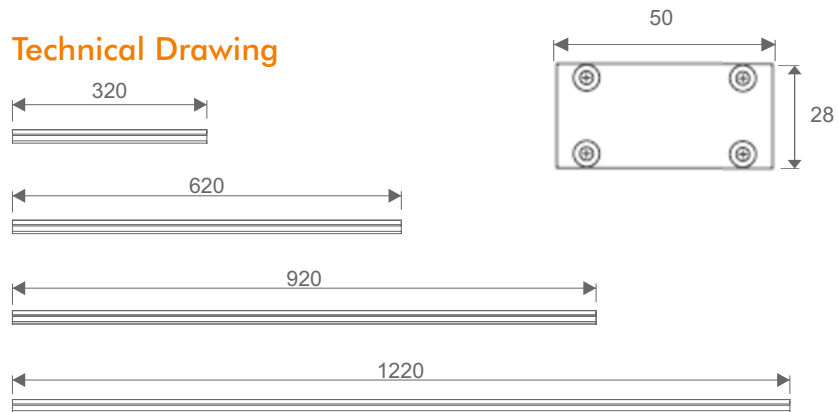

Connection Diagram

