

CUBE

Outdoor type
LED Bollard Lighting



CUBE combines a squared, elegant shape to radial optics specially designed to ensure the best lighting performance, producing different light effects based on the screen type.

Understated and yet remarkably beautiful, CUBE is a prime example of the efficient power of puristic design. Without unnecessary frills; nothing distracts from the focus on the key essentials: powerful, homogeneous light in a perfectly flawless cylindrical form. Various light distributions, lumen packages, sizes and configurations make these highly adaptable LED outdoor luminaires even more flexible.

Key Advantages

- Flexible bollard
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
Aluminium PCB
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

Applications



Landscape




Outdoor



Urban

CUBE

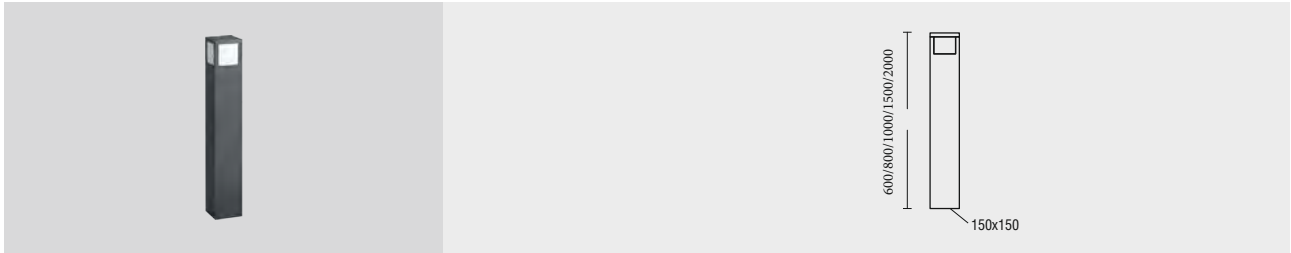


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C
Diffuser	Acrylic


Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options

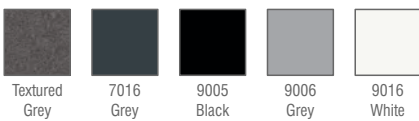

Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
CUBE.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
CUBE.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
CUBE.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
CUBE.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
CUBE.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
CUBE.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
CUBE.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
CUBE.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
CUBE.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
CUBE.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280

* For different options, please contact our team.

Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX