


FACIEM S OPTICS

Linear In-Ground

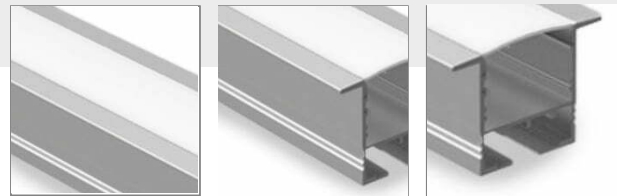

A recessed slim inground. Faciem stands for pure light: it produces a light beam which is important when switched on, to disappear from view once it is off.

Those features, with the simple ease of installation, allow Faciem to be used as a single light point or in series on the roof. It can highlight even individual architectural elements such as statues to the utmost. The luminaire is 24VDC. It makes architecture the protagonist and creates suggestive light paths thanks to its excellent lighting performance and high versatility of use.

Luminaire comes with 1 sides cable as standard.

Characteristics

Aluminium Injection Die Cast Body
Electrostatic Powder Paint
Optional RAL Colors
Extra Clear 5mm Tempered Glass
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver
PMMA Diffuser


Key Advantages

- Slim for modern designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



FACIEM S OPTICS

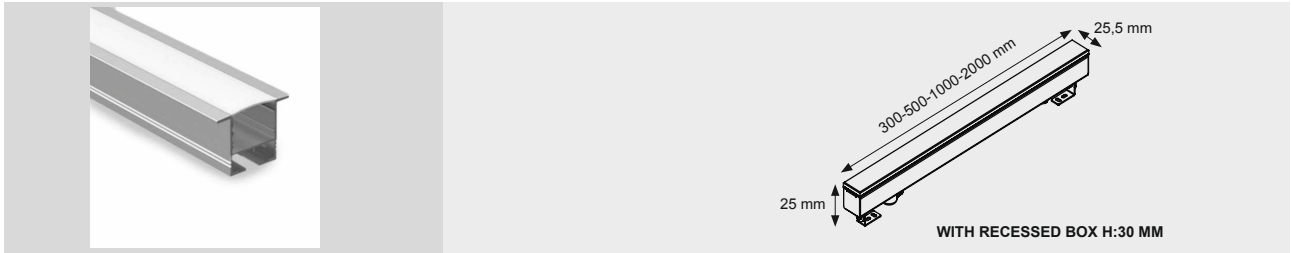


Standard Product

Input	24V / DC
Control	On / Off
Optic	120°
Light Color	2800K
Body Color	7016 Grey
Frame	Stainless Steel
CRI	> 82
Protection	IP67
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
Glass	Transparent diffuser
CRI	> 90
Protection	IP68
Warranty	7-10 Years
Cable	2 Sides
Connector	IP68


Light Colors



Ordering Details

Product Code	Power	Lenght	Light Color	Lumen
FACIEM.6.AC.N.500.2800.120.7016	6W	500mm	2800K	540
FACIEM.4.AC.N.1000.2800.120.7016	4W	1000mm	2800K	360
FACIEM.7.AC.N.1500.2800.120.7016	7W	1500mm	2800K	450
FACIEM.9.AC.N.2000.2800.120.7016	9W	2000mm	2800K	630

Body Colors Options

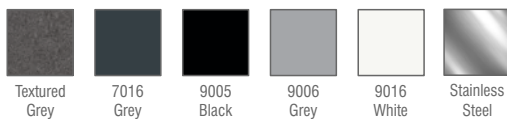

Beam Angle Options



* For different options, please contact our team.

Optional Accessories



Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	ON/OFF 0-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX