

# ICONIC

Outdoor Type  
Decorative Lighting Poles



**ICONIC** is the pole light that integrates easily into any environment. with thin diffuser it produces direct light, with opal screen the perfect diffusion and homogeneity of light reduces the number of installations needed, optimizing consumption and reducing light pollution.

Available in different colour temperatures and powers, in order to meet any requirement of the lighting project. The urban lighting version is perfect for the illumination of city parks, squares or pedestrian areas.

## Characteristics

Aluminium body
High efficiency LED lighting
Electrostatic powder paint
High quality silicone gasket
Galvanized metal anchorage
Aluminium PCB
LED with Life Span > 100.000 Hours
CCT tolerance within a 3 step MacAdams ellipse
Corrosion Protection
5 Years Warranty
Marine Coating (Optional)
ENEC Certified Driver

## Key Advantages

- Aluminium Body
- Smart energy savings
- Delivery of complete assembly
- Corrosion resistance

## Applications




Landscape



Outdoor



Urban

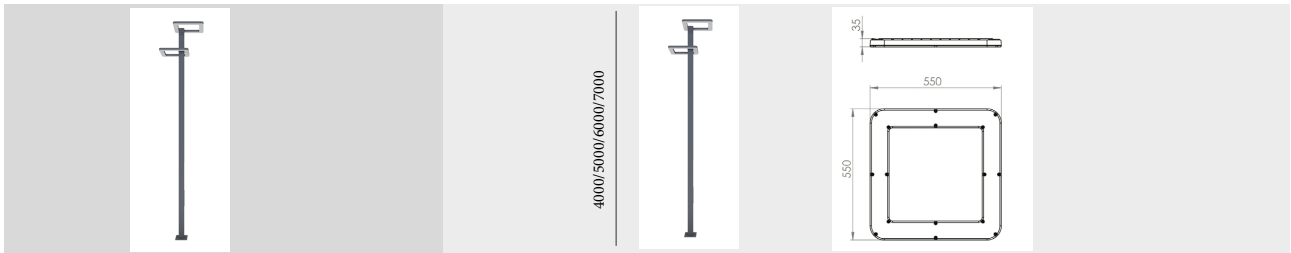

## Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK10
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

## Available Options


*\* Possibility of production in different lengths and sections.*

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67
Warranty	7-10 Years


## Ordering Details

Product Code	Power	Light Color	Dimensions Lumen	
ICONIC.20.AC.N.4.SYM.7016	20W	4000K	4000	2300
ICONIC.30.AC.N.4.SYM.7016	30W	4000K	4000	3450
ICONIC.40.AC.N.4.SYM.7016	40W	4000K	4000	4600
ICONIC.50.AC.N.4.SYM.7016	50W	4000K	4000	5750
ICONIC.60.AC.N.4.SYM.7016	60W	4000K	4000	6900
ICONIC.20.AC.N.4.SYM.7016	20W	4000K	5000	2300
ICONIC.30.AC.N.4.SYM.7016	30W	4000K	5000	3450
ICONIC.40.AC.N.4.SYM.7016	40W	4000K	5000	4600
ICONIC.50.AC.N.4.SYM.7016	50W	4000K	5000	5750
ICONIC.60.AC.N.4.SYM.7016	60W	4000K	5000	6900
ICONIC.20.AC.N.4.SYM.7016	20W	4000K	6000	2300
ICONIC.30.AC.N.4.SYM.7016	30W	4000K	6000	3450
ICONIC.40.AC.N.4.SYM.7016	40W	4000K	6000	4600
ICONIC.50.AC.N.4.SYM.7016	50W	4000K	6000	5750
ICONIC.60.AC.N.4.SYM.7016	60W	4000K	6000	6900
ICONIC.20.AC.N.4.SYM.7016	20W	4000K	7000	2300
ICONIC.30.AC.N.4.SYM.7016	30W	4000K	7000	3450
ICONIC.40.AC.N.4.SYM.7016	40W	4000K	7000	4600
ICONIC.50.AC.N.4.SYM.7016	50W	4000K	7000	5750
ICONIC.60.AC.N.4.SYM.7016	60W	4000K	7000	6900


## Light Colors



## Body Colors Options

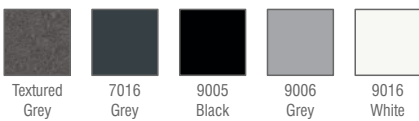

## Light Effect



## Optional Accessories



IP66 Junction Box

*\* For different options, please contact our team.*



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX XX	XX	AC DC	push/off 1-3 DV PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX XX	AC DC	N V	P T D	3 4 6	XX	XX