

LINEA MAG

magnetic type

linear lighting fixture



- Aluminum extruded body
- UV protected diffuser
- Nickel plated brass parts
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI > 80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 120° Opaque
	Operating Temperature : -20 / 40 °C
B	Grey Body Color

PRODUCT CODE	W	Lenght	Temp	Lumen*
LINEA MAG.5.73.N.4.120	5	73	4000K	550
LINEA MAG. 10.164.N.4.120	10	164	4000K	1100
LINEA MAG.15.320.N.4.120	15	320	4000K	1650
LINEA MAG.25.640.N.4.120	25	640	4000K	2750
LINEA MAG.40.960.N.4.120	40	960	4000K	4400


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 2700K	Light Temperature 3000K	Light Temperature 4000K	Light Temperature 5000K	Dynamic White	Color Rendering Index > 90	Optional Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	2.7K	3K	4K	5K	DYN	CRI > 90	W

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX XX	XX XX	XX XX	N V P T D	2 3 4 5	XX



TECHNICAL DRAWINGS

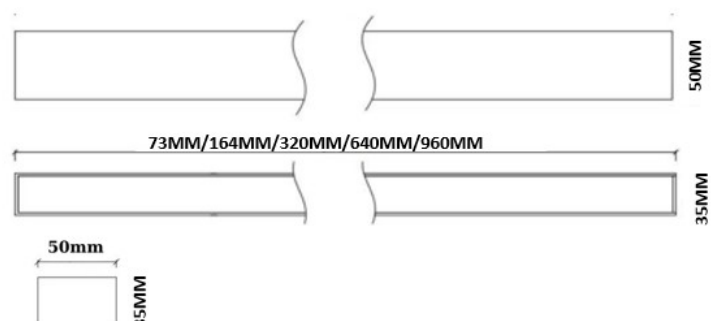

* For different options, please contact our team.