




LINERES XS

pendant & surface type

linear lighting fixture

- Aluminum extruded body
- Anti-glare optical lens
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC standards



PRODUCT CODE	W	Lenght	Temp	Lumen*
LINERES XS.18.670.N.4.50	18	670	4000K	2200
LINERES XS.18.670.N.4.80	18	670	4000K	2170
LINERES XS.18.800.N.4.50	18	800	4000K	2200
LINERES XS.18.800.N.4.80	18	800	4000K	2170
LINERES XS.27.930.N.4.50	27	930	4000K	3350
LINERES XS.27.930.N.4.80	27	930	4000K	3320
LINERES XS.27.1000.N.4.50	27	1000	4000K	3350
LINERES XS.27.1000.N.4.80	27	1000	4000K	3320
LINERES XS.36.895.N.4.50	36	895	4000K	4600
LINERES XS.36.895.N.4.80	36	895	4000K	4560
LINERES XS.36.1500.N.4.50	36	1500	4000K	4600
LINERES XS.36.1500.N.4.80	36	1500	4000K	4560
LINERES XS.45.1700.N.4.50	45	1700	4000K	5540
LINERES XS.45.1700.N.4.80	45	1700	4000K	5500


BASIC OPTIONS

- on/off** on/off Control (No Dimmable)
- 230V AC** Input Voltage 220-240V/AC, 50-60HZ
- CRI >80** Color Rendering Index > 80
- 4K** Light Temperature 4000K
- Light Beam 50°, 80°**
- Operating Temperature** : -20 / 40 °C
- B** Black Body Color

CUSTOMIZE OPTIONS

- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index > 90
- Optional Body Color
- Emergency KIT
- Pendant or Surface Type

- 1-10V
- PUSH
- TRIAC
- DALI
- 24V DC
- 3K
- 6.5K
- DYN
- CRI >90
- B
- E
- M

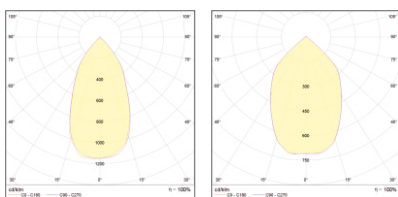


* According to 4000K light temperature

PRODUCT CODING

Product Name	Product Power	Product Size	Control System	Color Temperature	Light Beam
XX	XX	XX	on/off, 1-10V, PUSH, TRIAC, DALI	3K, 4K, 6.5K	XX
XX	XX	XX	N, V, P, T, D	3, 4, 6	XX

TECHNICAL DRAWINGS

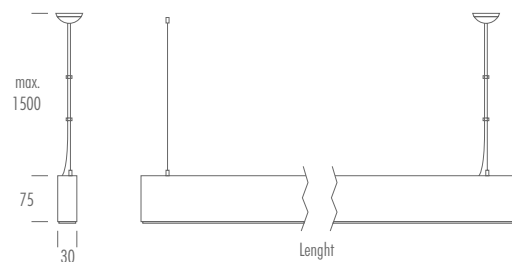

* For different options, please contact our team.