



LOOP L P73

LED pendant type

Circular LED lighting fixture



- Aluminum extruded body
- Anodized coating
- UV protected frosted diffuser
- Adjustable length steel ropes
- Nickel plated brass parts
- Constant current LED driver
- Electrostatic powder coating paint
- Production in different lengths
- Optional body colors
- ENEC Standarts
- IP40

LED	230V	IP40 INT	CRI >80			60.000h L80	McAdam C3	CE	
-----	------	----------	---------	--	--	-------------	-----------	----	--

BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser Black
B	Body Color
°C	-20°C/+45°C Temperature


*With Ceiling Mounted Electrical Junction Box

*With 1M Adjustable Steel Ropes


CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90		W	E

*For different options, please contact our team.



TECHNICAL DRAWINGS

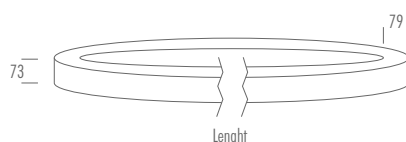

* According to Product Color Temperature

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX XX XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX