


recessed type
downlight



Aluminum injection body,
UV protected diffuser,
Opal Polystyren/PMMA (Fire-Proof) /
Microprismatic (3D) Diffuser Types,
Constant current LED driver,
Electrostatic powder coating paint,
Optional body colors,
ENEC Standards

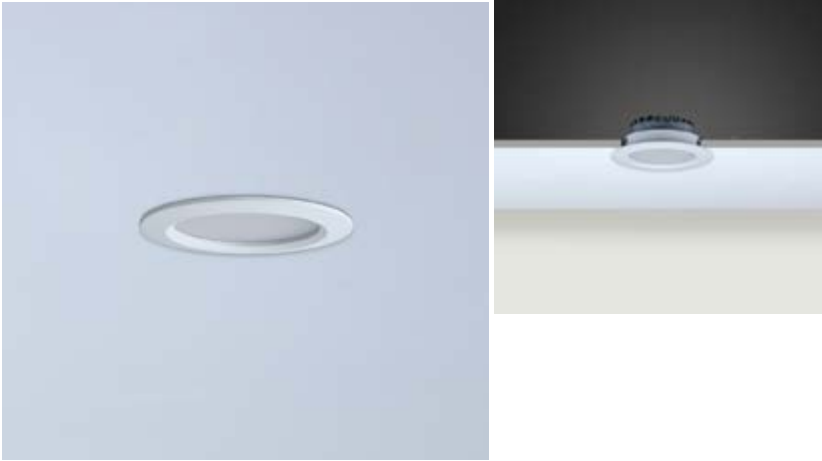

BASIC OPTIONS

| | |
|---------|-------------------------------|
| on/off | on/off Control (No Dimmable) |
| 230V AC | Input Voltage 230V/AC |
| CRI >80 | Color Rendering Index > 80 |
| 4K | Light Temperature 4000K Light |
| | Beam 100° |
| | White Polystyren Diffuser |
| w | White Body Color |

| PRODUCT CODE | W | Height | Length | Hole Size | Temp | Lumen* |
|------------------------|----|--------|--------|-----------|-------|--------|
| MESA 2".6.100.N.4.100 | 6 | 55 | Ø100 | Ø85 | 4000K | 570 |
| MESA 3".8.117.N.4.100 | 8 | 55 | Ø117 | Ø105 | 4000K | 760 |
| MESA 4".10.147.N.4.100 | 10 | 55 | Ø147 | Ø130 | 4000K | 1050 |
| MESA 5".16.173.N.4.100 | 16 | 55 | Ø173 | Ø158 | 4000K | 1840 |
| MESA 6".21.190.N.4.100 | 21 | 55 | Ø190 | Ø175 | 4000K | 2415 |
| MESA 8".23.231.N.4.100 | 23 | 55 | Ø229 | Ø214 | 4000K | 2703 |
| MESA 8".30.231.N.4.100 | 30 | 55 | Ø229 | Ø214 | 4000K | 3500 |


* According to 4000K light temperature

CUSTOMIZE OPTIONS


| | | | | | | | | | | |
|----------------|---------------|----------------|---------------|----------------------|-------------------------|-------------------------|---------------|----------------------------|------------------|---------------|
| Dimmable 1-10V | Dimmable PUSH | Dimmable TRIAC | Dimmable DALI | Input Voltage 24V/DC | Light Temperature 3000K | Light Temperature 6500K | Dynamic White | Color Rendering Index > 90 | Diffuser Options | EMERGENCY KIT |
| 1-10V | PUSH | TRIAC | DALI | 24V DC | 3K | 6.5K | DYN >90 | CRI >90 | | E |

PRODUCT CODING

| Product Name | Product Power | Product Size | Control System | | | | | Color Temperature | | | Light Beam |
|--------------|---------------|--------------|----------------|-------|------|-------|------|-------------------|----|------|------------|
| XX XX XX | XX | XX | OFF | 1-10V | PUSH | TRIAC | DALI | 3K | 4K | 6.5K | |
| XX XX XX | N | V | P | T | D | 3 | 4 | 6 | XX | | |



TECHNICAL DRAWINGS

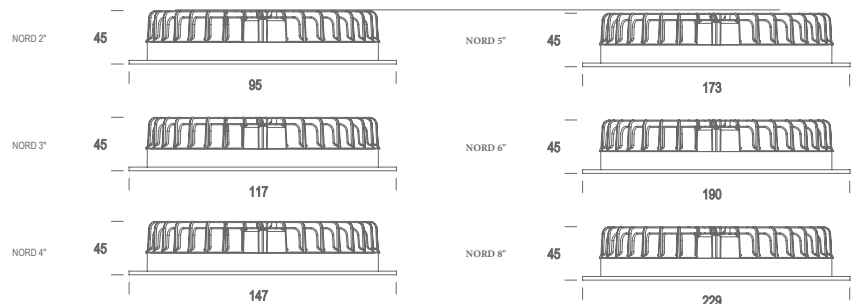

* For different options, please contact our team.