

# MIA

LED surface type  
Ceiling/Wall mounted lighting fixture



**Having Indoor and outdoor use of Mia with Polycarbonate case is correct choice for multiple applications such as corridors, tunnels, balconies, rooms, park areas with IP65 protection.**

**It can have motion sensor, radar or 3H kit as built in. It has clean view with Built-in LED driver 220-240V 50-60Hz.**

It can be directly on the wall, ceiling, surface mounted with symmetric light distribution. Emergency lighting functional as interruption of the unswitched phase 3 hours duration in case of emergency.

\*Status display with green and red LEDs.

---

Aluminium Injection Body

---

Electrostatic Powder Paint

---

Optional RAL Colors

---

PMMA Diffuser

---

Aluminium PCB

---

LED with Life Span > 100.000 Hours

---

CCT tolerance within a 3 step MacAdams ellipse

---

Corrosion Protection (Optional)

---

5 Years Warranty

---

Marine Coating (Optional)

---

## Key Advantages

- Glare-free
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance
- Symmetric Beam
- UV Resistant Diffuser
- Modern Design

## Applications



Exterior



Interior



Corridors



Pathway



Public



Hotels




Facade



Architectural



Ancient

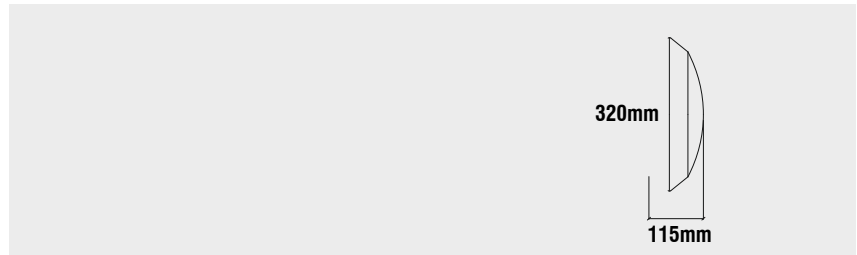


## Standard Product

Input	220-240V / AC 50-60Hz
Control	On / Off
Optic	120°
Light Color	4000K
Body Color	9016 White
CRI	>82
Protection	IP65
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,090
Weight	1 kg
Ambient Temperature	-30°C / +60°C

## Available Options

Input	24V / DC
Control	DALI, DIM, DMX
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP66 - IP67
Warranty	7-10 Years
Glass	Extra Clear

## Light Colors




## Ordering Details


Product Code	Power	Light Color	Lumen
MIA.20.AC.N.4.120.9016	20W	5000K	2000
MIA.22.AC.N.4.120.9016	22W	5000K	2315
MIA.25.AC.N.4.120.9016	25W	5000K	2600

\* For different options, please contact our team.

## Body Colors Options

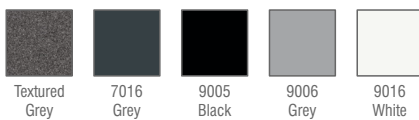

## Beam Angle Options



## Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX