

OPHEN WALL WASH

recessed type
downlight



Aluminium injection body
COB LED
Constant current LED driver
Electrostatic powder coating paint Optional
body colors
ENEC standards



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
OPHEN.15.98.N.3	15	67MM	98MM	85MM	3000K	2010

BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index >80
3K	Light Temperature 3000K
	Light Beam 19°, 40°
	Operating Temperature : -20 / 40 °C
w	White Body Color

* According to 3000K light temperature



PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 4000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Optional Body Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	4K	6.5K	DYN	CRI >90	B	E

TECHNICAL DRAWINGS

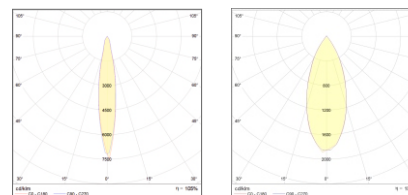

* For different options, please contact our team.