


PANEL 60x60

LED recessed type
Backlight panel lighting



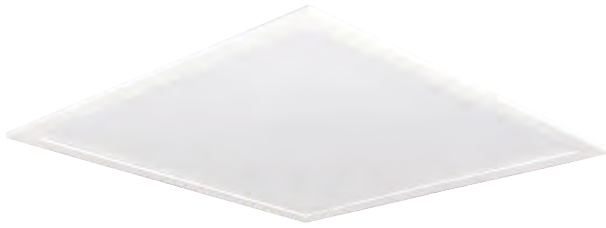

- DKP sheet metal body
- Electrostatic coated
- UV protected diffuser
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards

Made in TURKEY



BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-240V/AC - 50/60 Hz 5
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 120°
	White Satin Polycarbonate Diffuser
°C	-20°C/+40°C Temperature

PRODUCT CODE	W	Lenght	Temp	Lumen*
STANDARD LUMEN				
PL596.28P.596x596.N.4.120	28	596x596	4000K	2800
PL596.36P.596x596.N.4.120	36	596x596	4000K	3600
PL596.42P.596x596.N.4.120	42	596x596	4000K	4200


* According to 4000K light temperature


HIGH LUMEN

PL596HL.28P.596x596.N.4.120	28	596x596	4000K	3350
PL596HL.36P.596x596.N.4.120	36	596x596	4000K	4320
PL596HL.42P.596x596.N.4.120	42	596x596	4000K	4800


* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Transparent Diffuser	White Body Color	EMERGENCY KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN >90	CRI >90		W	E



PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	on/off	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS



* For different options, please contact our team.