



- Aluminum injection body
- High efficiency reflector
- Tempered Glass
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable) Input
230V AC	Voltage 220-230V/AC - 50-60Hz
CRI >80	Color Rendering Index >80
4K	Light Temperature 4000K
	Light Beam 23°, 37°, 51°
w	White Body Color

PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
QDOT.7.92.N.4.23	7	56	92x92	82MM	4000K	770
QDOT.7.92.N.4.37	7	56	92x92	82MM	4000K	750
QDOT.7.92.N.4.51	7	56	92x92	82MM	4000K	730
QDOT.10.92.N.4.23	10	56	92x92	82MM	4000K	1070
QDOT.10.92.N.4.37	10	56	92x92	82MM	4000K	1050
QDOT.10.92.N.4.51	10	56	92x92	82MM	4000K	1030
QDOT.13.92.N.4.23	13	56	92x92	82MM	4000K	1260
QDOT.13.92.N.4.37	13	56	92x92	82MM	4000K	1240
QDOT.13.92.N.4.51	13	56	92x92	82MM	4000K	1220


*According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index >90	Black / Grey Body Color	Emergency kit
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	E

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K		
XX	XX	XX	N	V	P	T	D	3	4	6	XX

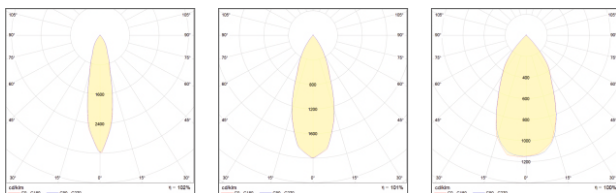

* For different options, please contact our team.

TECHNICAL DRAWINGS

