



SATEEN TRIO

recessed type
downlight



- Aluminium injection body
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC standards



BASIC OPTIONS

on/off	on/off Control (No Dimmable)
230V AC	Input Voltage 220-240V/AC, 50-60HZ
CRI >80	Color Rendering Index > 80
4K	Light Temperature 4000K
	Light Beam 16°, 24°, 46°, 74°
	Operating Temperature : -20 / 40 °C
w	White Body Color


PRODUCT CODE

PRODUCT CODE	W	Height	Lenght	Hole Size	Temp	Lumen
SATEEN.TRIO.60.460x190.N.4.16	60	115	510x190	480x165	4000K	7600
SATEEN.TRIO.60.460x190.N.4.24	60	115	510x190	480x165	4000K	7570
SATEEN.TRIO.60.460x190.N.4.46	60	115	510x190	480x165	4000K	7540
SATEEN.TRIO.60.460x190.N.4.74	60	115	510x190	480x165	4000K	7510
SATEEN.TRIO.90.460x190.N.4.16	90	115	510x190	480x165	4000K	12200
SATEEN.TRIO.90.460x190.N.4.24	90	115	510x190	480x165	4000K	12170
SATEEN.TRIO.90.460x190.N.4.46	90	115	510x190	480x165	4000K	12140
SATEEN.TRIO.90.460x190.N.4.74	90	115	510x190	480x165	4000K	12110
SATEEN.TRIO.126.460x190.N.4.16	126	115	510x190	480x165	4000K	17000
SATEEN.TRIO.126.460x190.N.4.24	126	115	510x190	480x165	4000K	16970
SATEEN.TRIO.126.460x190.N.4.46	126	115	510x190	480x165	4000K	16940
SATEEN.TRIO.126.460x190.N.4.74	126	115	510x190	480x165	4000K	16910

* According to 4000K light temperature

CUSTOMIZE OPTIONS


Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Optional Body Color	Optional Reflector Color	Emergency KIT
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI >90	B	R	E

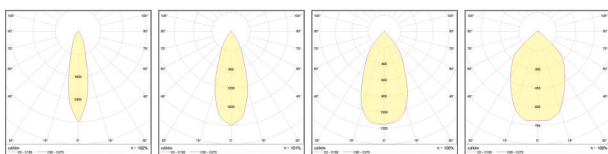

PRODUCT CODING

Product Name	Product Power	Product Size	Control System				Color Temperature			Light Beam	
XX	XX	XX	PUSH	1-10V	TRIAC	DALI	3K	4K	6.5K	XX	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

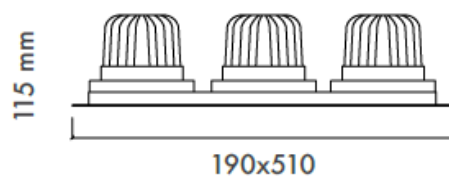

* For different options, please contact our team.