

STO

recessed type
downlight



- Aluminum injection body
- UPMMA optical lens
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors



PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
STO.2.95.N.4.25	2	23	Ø52	Ø45	4000K	151
STO.2.95.N.4.47	2	23	Ø52	Ø45	4000K	146

* According to 4000K light temperature



BASIC OPTIONS

- on/off Control (No Dimmable)
- Input Voltage 230V/AC
- Color Rendering Index >80
- Light Temperature 4000K
- Light Beam 10°, 16°, 23°
- Aluminium Body Color

CUSTOMIZE OPTIONS



- Dimmable 1-10V
- Dimmable PUSH
- Dimmable TRIAC
- Dimmable DALI
- Input Voltage 24V/DC
- Light Temperature 3000K
- Light Temperature 6500K
- Dynamic White
- Color Rendering Index >90
- Black Body Color
- EMERGENCY KIT



PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	ON/OFF	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	XX
XX	XX	XX	N	V	P	T	D	3	4	6	XX

TECHNICAL DRAWINGS

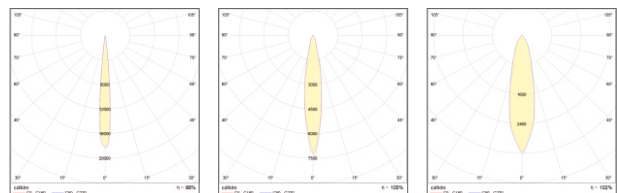

* For different options, please contact our team.