


TROP

LED surfaced type
High Performance Industrial Lighting

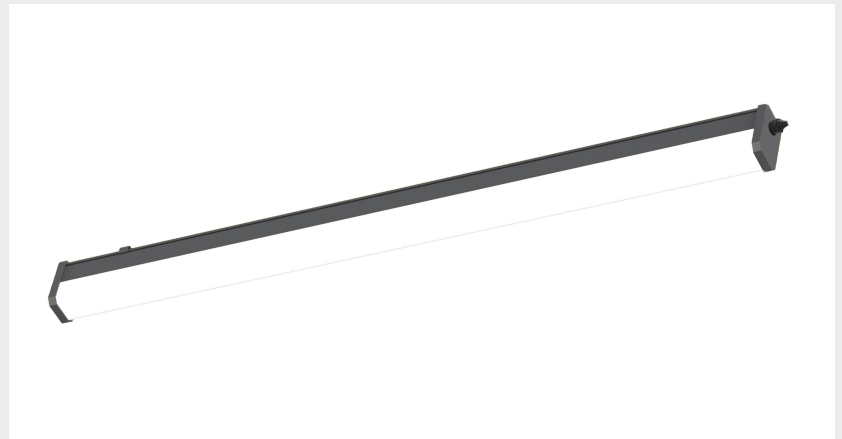

TROP Linear serie is intended for new hazardous area installations as well as retrofitting existing fluorescent systems that require high-performance. TROP is a harmonic combination of strong and attractive and attractive form.

Housing of UV stabilized, made of Aluminium body, in grey. Two clamps for surface mounting of the luminaire. Natural silicone gel gasket. TROP can be installed in enviroments with high temperature. If the light fittings are installed in exterior, the degree of IP protection is IP66.

Characteristics

| |
|---|
| Aluminium Extrusion body |
| Aluminium End caps |
| Polycarbonate Opal White diffuser |
| Constant Current output LED driver |
| With high efficiency aluminium PCB |
| UV Protected PMMA Diffuser & Body |
| LED with Life Span > 100.000 Hours |
| CCT tolerance within a 3 step MacAdams ellipse |
| Corrosion Protection for diffuser & body (Optional) |
| 5 Years Warranty |
| Marine Coating (Optional) |


Key Advantages

- High Efficiency
- Safe Instalation and application
- Cost-Efficient
- Various installation type
- Easy installation
- High performance LED
- High corrosion resistance


Applications




Werehouse



Indoor Ceeling




Parking Area



Ports

TROP

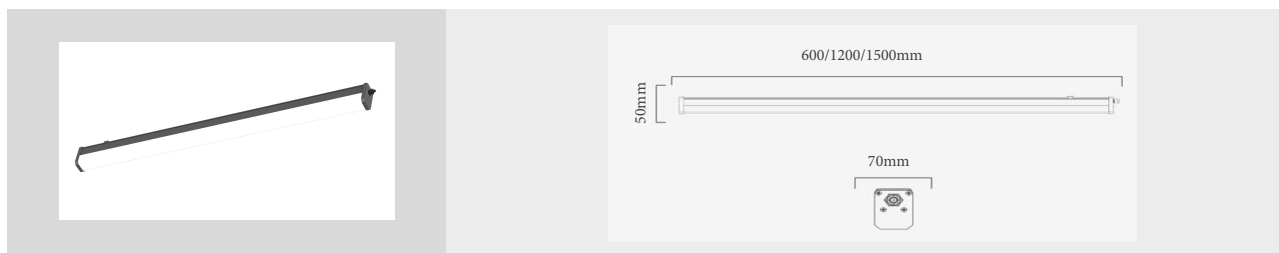


Standard Product

| | |
|----------------------|-----------------------|
| Input | 210-260V / AC 50-65Hz |
| Control | On / Off |
| Optic | 120° |
| Light Color | 4000K |
| Body Color | 9006 Grey |
| CRI | >82 |
| Protection | IP66 |
| Impact Resistance | IK09 |
| Protection class IEC | Class I |
| Power factor (min.) | 0,092 |
| Wind Catching Area | 0,26m ² |
| Weight | 1,2kg |
| Ambient Temperature | -25°C / +60°C |


Available Options

| | |
|--|---------------------------------|
| Input | 24V / DC |
| Control | DALI, DIM, DMX |
| Light Color | 2200, 2700, 3000K, 5000K, 6500K |
| Body Color | Optional RAL colors |
| Protection | IP67-IP68 |
| Surge protection (common/differential) | 4KV/6KV |
| CRI | >90 |
| Warranty | 7-10 Years |

Light Colors




Body Colors Options

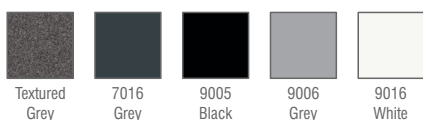

Optional Accessories



Beam Angle Options



Ordering Details

| Product Code | Power | Light Color | Dimensions | Lumen |
|-----------------------------|-------|-------------|------------|-------|
| TROP10.600.AC.N.4.120.9006 | 10W | 4000K | 600 | 1280 |
| TROP15.600.AC.N.4.120.9006 | 15W | 4000K | 600 | 1920 |
| TROP20.600.AC.N.4.120.9006 | 20W | 4000K | 600 | 2560 |
| TROP25.600.AC.N.4.120.9006 | 25W | 4000K | 600 | 3000 |
| TROP30.600.AC.N.4.120.9006 | 30W | 4000K | 600 | 3850 |
| TROP30.1200.AC.N.4.120.9006 | 30W | 4000K | 1200 | 3850 |
| TROP35.1200.AC.N.4.120.9006 | 35W | 4000K | 1200 | 4480 |
| TROP40.1200.AC.N.4.120.9006 | 40W | 4000K | 1200 | 5120 |
| TROP45.1200.AC.N.4.120.9006 | 45W | 4000K | 1200 | 5760 |
| TROP50.1200.AC.N.4.120.9006 | 50W | 4000K | 1200 | 6400 |
| TROP30.1500.AC.N.4.120.9006 | 30W | 4000K | 1500 | 3850 |
| TROP40.1500.AC.N.4.120.9006 | 40W | 4000K | 1500 | 5120 |
| TROP50.1500.AC.N.4.120.9006 | 50W | 4000K | 1500 | 6400 |
| TROP55.1500.AC.N.4.120.9006 | 55W | 4000K | 1500 | 7040 |
| TROP60.1500.AC.N.4.120.9006 | 60W | 4000K | 1500 | 7680 |
| TROP65.1500.AC.N.4.120.9006 | 65W | 4000K | 1500 | 8320 |

* For different options, please contact our team.

Product Coding

| Product Name | Product Power | Input | Control System | Color Temperature | Light Beam | Body Color |
|--------------|---------------|--------------------|----------------|-------------------|------------|------------|
| XX | XX | AC DC on/off 1-10V | PUSH TRAC DALI | 3K 4K 6.5K | XX | XX |
| XX | XX | AC DC N V P T D | | 3 4 6 | XX | XX |