

VETERIS BOLLARD



Veteris represent the maximum expression of love and respect for the tradition of great historical city centers.

This HB-LUX decorative classic layout is ideal for lighting public parks, squares or pedestrian areas. The bollard version is perfect to complement the public lighting of a park or a pedestrian area, ideal for adding elegance to an entrance or to enhance a private garden. with a classic-style décor is able to enhance the value of historic city centres giving them a timeless style.

Characteristics

- Aluminium body
- High Efficiency LED Lighting
- PMMA acrylic light diffuser
- Electrostatic powder paint
- High quality silicon gasket
- Anchor system
- Optional body colors
- LED with Life Span > 100.000 Hours
- CCT tolerance within a 3 step MacAdams ellipse
- Corrosion Protection
- 5 Years Warranty
- Marine Coating (Optional)
- ENEC Certified Driver

Key Advantages

- For historical designs.
- Economic and efficient
- Easy installation
- High performance LED
- High corrosion resistance

Applications



Landscape




Outdoor



Urban

VETERIS BOLLARD

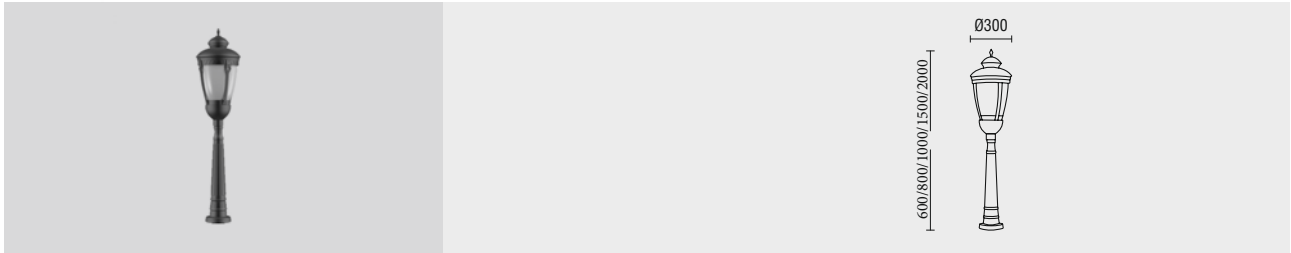


Standard Product

Input	100-305V / AC 50-65Hz
Control	On / Off
Optic	Symmetrical
Light Color	4000K
Body Color	7016 Grey
CRI	>82
Protection	IP66
Impact Resistance	IK09
Protection class IEC	Class I
Power factor (min.)	0,092
Weight	- kg
Ambient Temperature	-30°C / +60°C

Available Options

Input	24V / DC
Control	RGB, DALI, DIM, DMX
Optic	8°, 15°, 30°, 50°, 60°, 70°, 90°, 120°, Asymmetrical
Light Color	2200K, 2700K, 3000K, 5000K, 6500K
Body Color	Optional RAL colors
CRI	>90
Protection	IP67-IP68
Impact Resistance	IK10
Warranty	7-10 Years
Diffuser	Transparent or Opaque


Light Colors



Body Colors Options



Light Effect



Ordering Details

Product Code	Power	Light Color	Dimensions	Lumen
VETERIS.8.600.AC.N.4.SYM.7016	8W	4000K	600mm	1056
VETERIS.10.600.AC.N.4.SYM.7016	10W	4000K	600mm	1320
VETERIS.15.800.AC.N.4.SYM.7016	15W	4000K	800mm	1980
VETERIS.20.800.AC.N.4.SYM.7016	20W	4000K	800mm	2640
VETERIS.25.1000.AC.N.4.SYM.7016	25W	4000K	1000mm	3300
VETERIS.30.1000.AC.N.4.SYM.7016	30W	4000K	1000mm	3960
VETERIS.25.1500.AC.N.4.SYM.7016	25W	4000K	1500mm	3300
VETERIS.30.1500.AC.N.4.SYM.7016	30W	4000K	1500mm	3960
VETERIS.35.2000.AC.N.4.SYM.7016	35W	4000K	2000mm	4620
VETERIS.40.2000.AC.N.4.SYM.7016	40W	4000K	2000mm	5280



Optional Accessories



IP67
Junction
Box

Product Coding

Product Name	Product Power	Input	Control System	Color Temperature	Light Beam	Body Color
XX	XX	AC DC	on/off 1-10V PUSH TRAC DALI	3K 4K 6.5K	XX	XX
XX	XX	AC DC	N V P T D	3 4 6	XX	XX