

LYROS TRIO

recessed type


downlight



- Aluminum injection body
- Tempered or Frosted Glass
- High efficiency reflector
- Constant current LED driver
- Electrostatic powder coating paint
- Optional body colors
- ENEC Standards
- Made in TURKEY



BASIC OPTIONS

on/off	On/off Control (No
230V AC	Dimmable) Input Voltage
CRI > 80	230V/AC Color Rendering
4K	Index > 80 Light Temperature
	4000K Light Beam 23°, 37°,
W	51° White Body Color
L	40° Adjustable Heads


PRODUCT CODE	W	Height	Length	Hole Size	Temp	Lumen*
LYRAS3.21.120x360.N.4.23	21	90	120x360	105x265	4000K	2310
LYRAS3.21.120x360.N.4.37	21	90	120x360	105x265	4000K	2290
LYRAS3.21.120x360.N.4.51	21	90	120x360	105x265	4000K	2270
LYRAS3.30.120x360.N.4.23	30	90	120x360	105x265	4000K	3210
LYRAS3.30.120x360.N.4.37	30	90	120x360	105x265	4000K	3290
LYRAS3.30.120x360.N.4.51	30	90	120x360	105x265	4000K	3270


*According to 4000K light temperature

CUSTOMIZE OPTIONS

Dimmable 1-10V	Dimmable PUSH	Dimmable TRIAC	Dimmable DALI	Input Voltage 24V/DC	Light Temperature 3000K	Light Temperature 6500K	Dynamic White	Color Rendering Index > 90	Black Body Color	Grey Body Color
1-10V	PUSH	TRIAC	DALI	24V DC	3K	6.5K	DYN	CRI > 90	B	G

PRODUCT CODING

Product Name	Product Power	Product Size	Control System					Color Temperature			Light Beam
XX	XX	XX	PUSH	1-10V	PUSH	TRIAC	DALI	3K	4K	6.5K	
XX	XX	XX	N	V	P	T	D	3	4	6	XX

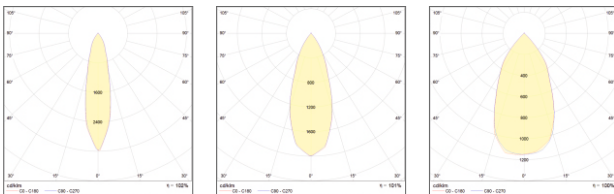

* For different options, please contact our team.

TECHNICAL DRAWINGS

